


Specifications


- 1 Poles: 2 to 20P
- 2 Current rating: 3.0A AC,DC
- 3 Voltage rating: 250V AC,DC
- 4 Temperature range: -25° to +85°
- 5 Contact resistance: $\leq 10\text{m}\Omega$
- 6 Insulation resistance: $\geq 1000\text{m}\Omega$
- 7 Withstand voltage: 1000V AC/minute
- 8 Applicable wire: AWG #30 to #22
- 9 Applicable PC board thickness: 1.6mm

Poles	Dimensions mm	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
--	--	--
20	47.50	52.50

R-Type:

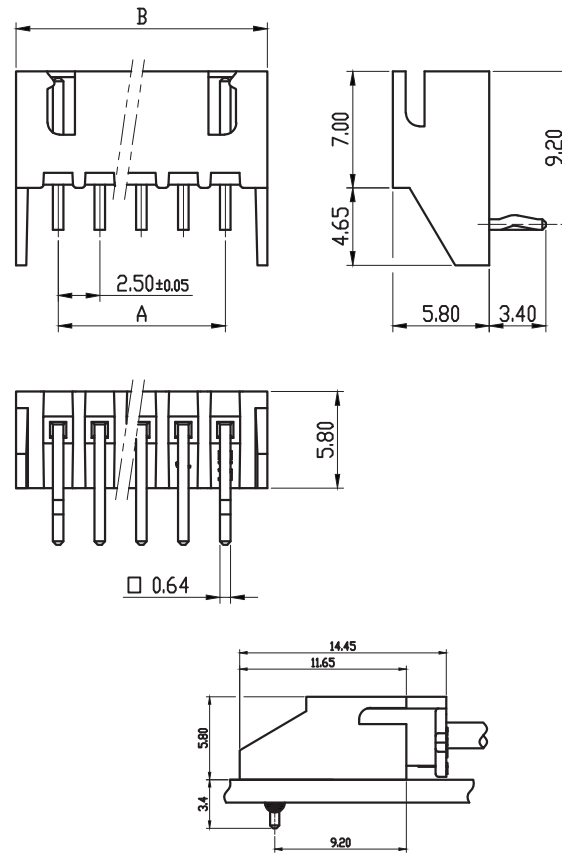

RB-Type:

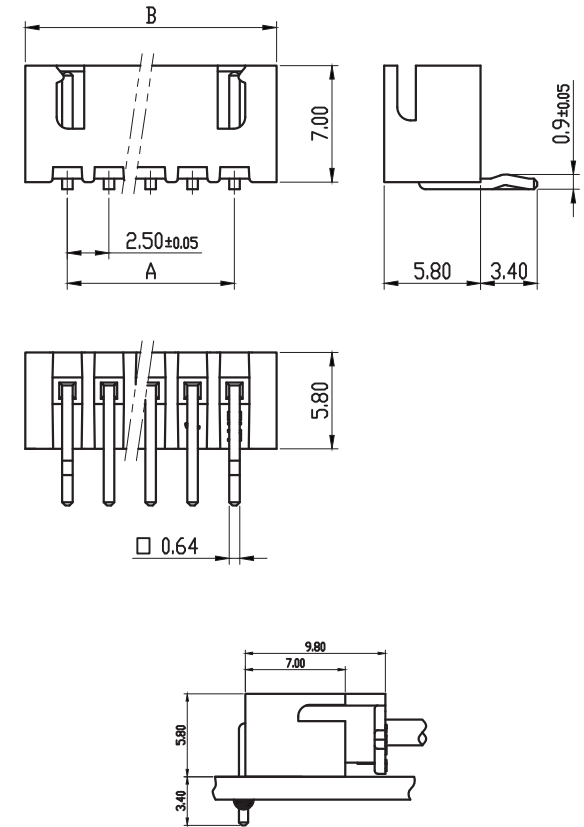

General description of ordering code

FAMILY	PITCH	N° PIN	VERSION
WC	250	XX [0 ≤ XX ≤ 20]	R
			RB



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

FILE **UL - E356435**

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

WAFER