


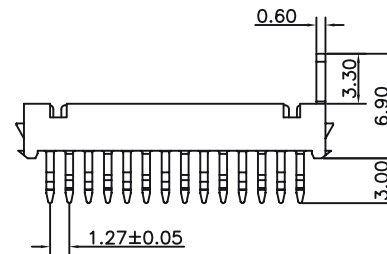


Current Rating: 1 AMP
Insulator Resistance: 1000M Ohm min. at DC 250V
Contact Resistance: 20m Ohm max. at DC 100mA
Operating Temperature: -45°C~+105°C

Housing: PBT UL94V-0
Contacts: Brass
Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area
Gold plated: 3u" over 50u" nickel
Cable: 1.27mm (0.050") pitch flat cable

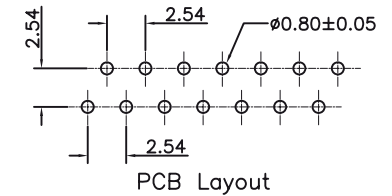

Mating Height Draw.



Part No.	Dimension		Part No.	Dimension		Part No.	Dimension	
	A	B		A	B		A	B
04	7.20	2.54	12	17.36	12.70	20	27.52	22.86
06	9.74	5.08	14	19.90	15.24	22	30.06	25.40
08	12.28	7.62	16	22.44	17.78	24	32.60	27.94
10	14.82	10.16	18	24.98	20.32	26	35.14	30.48

<i>FAMILY</i>	<i>MODEL</i>		<i>N° PIN</i>	<i>VERSION</i>	<i>PLATING</i>	<i>OPTION</i>	<i>OPTION1</i>
MT	M	-	XX	D [pcb straight]	T [tin]	0 [Standard]	0 [Standard]



euro-conn



± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MINI-MATCH