
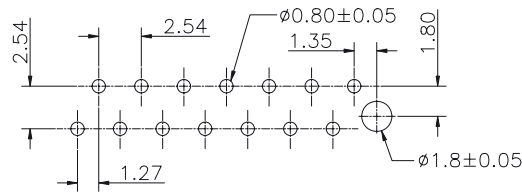

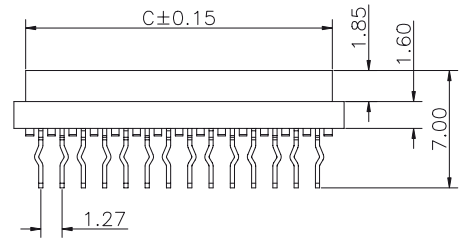



Electrical Characteristics:

Current Rating: 1 AMP  
Insulator Resistance: 1000M Ohm min. at DC 250V  
Contact Resistance: 20m Ohm max. at DC 100mA  
Operating Temperature: -45°C~+105°C

Material:

Housing: PBT UL94V-0  
Contacts: Brass  
Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area  
Gold plated: 3u" over 50u" nickel  
Cable: 1.27mm (0.050") pitch flat cable

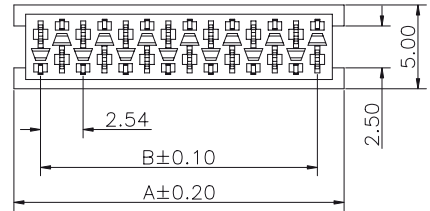

PCB Layout

Part No.	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

General description of ordering code

FAMILY	MODEL	N° PIN	VERSION	PLATING	OPTION	OPTION1
MT	F	XX	D [pcb straight]	T [tin]	0 [Standard]	0 [Standard]
						B [black]



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE:		! I prodotti e le caratteristiche possono cambiare senza preavviso. The products and their features may change without notice.
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120			
± 0.12	± 0.15	± 0.3	± 0.5			
MINI-MATCH						