


**Note:**

1: V.S.W.R: 1.5(0~3G), Max.

2: Wire surface shall have no dirt, broken.

3: Connector surface with coating, oxidation phenomenon..

4: Connector pins and insulator are in the same plane

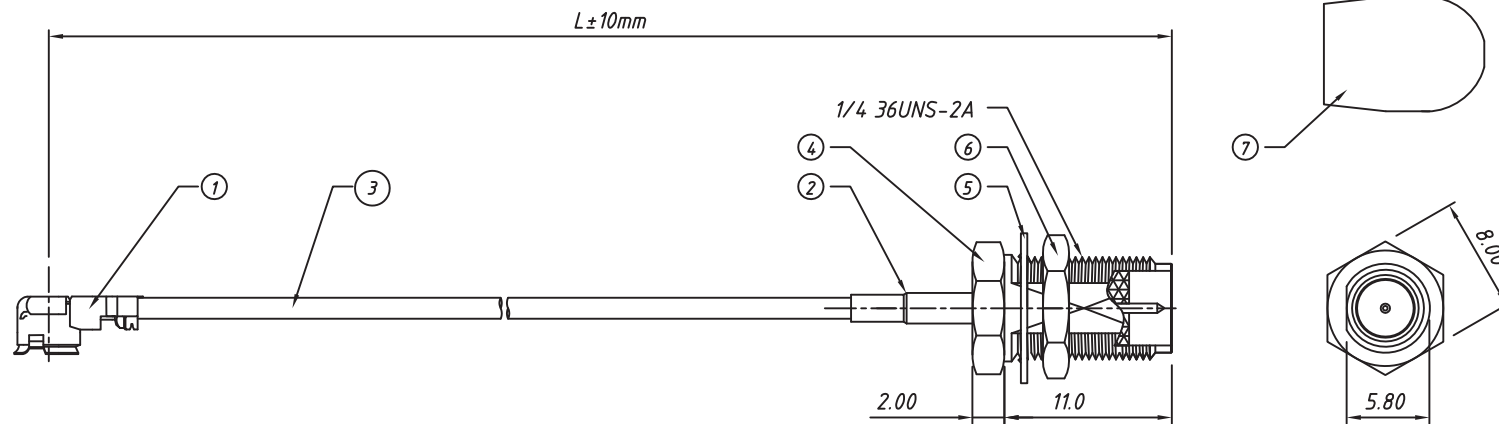

**I-PEX to RP SMA Female Cable**

7	CAP	Rubber CAP,Red	PCS	1
6	Nut	T1.8mm Nut,1/4 36UNS-2A	PCS	1
5	Washers	T0.4mm Washers	PCS	1
4	Connector	RP SMA Jack,Female Straight,for RG178,RG316,0.81,1.13,1.32,1.37mm	PCS	1
3	RF Cable	RG178,RG316,0.81,1.13,1.32,1.37mm Cable	mm	L
2	Heat-Shrink Tube	Ø1.0mm Heat-Shrink Tube,Block,L15mm	PCS	2
1	Connetor	I-PEX Plug,for RG178,RG316,0.81,1.13,1.32,1.37mm Cable	PCS	1
No.	Name	Description	UNITS	Q'ty

**General description of ordering code**

FAMILY	LENGHT(L)	TYPE
IPEXCAB	XXXX	SMA



**euro-conn**



**UNITS:** mm

**SHEET SIZE:** ISO A4

**SCALE:** ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

**RF COAXIAL CABLE**