
Note:

- 1: V.S.W.R: 1.5(0 3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

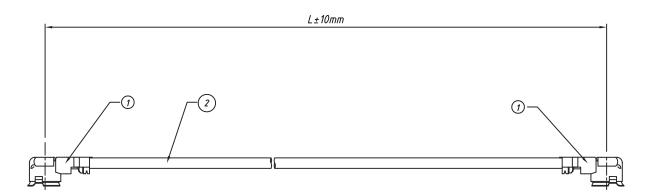

I-PEX to I-PEX Cable

General description of ordering code

							_
				FAMILY		I FNGHT(I)	
RF Cable	0.81,1.13,1.32,1.37mm Cable	mm	L	77071127		LETTOTTT (L)	
<i>-</i> ,	1 DEV Div. 6 0.04.443.4.32.4.37 C-1-1-	200		IDEVCAD	1	VVVV	
Lonnefor	1-PEX Plug, For 0.81, 1.13, 1.32, 1.37mm Cable	PLS	2	IPEXCAB	_	XXXX	
Name	Description	l IINITS I	Q'tv		_		
	RF Cable Connetor Name	Connetor I-PEX Plug.for 0.81,1.13,1.32,1.37mm Cable	Connetor I-PEX Plug, for 0.81,1.13,1.32,1.37mm Cable PCS	Connetor I-PEX Plug, for 0.81,1.13,1.32,1.37mm Cable PCS 2	Connetor I-PEX Plug, for 0.81,1.13,1.32,1.37mm Cable PCS 2	RF Cable 0.81,1.13,1.32,1.37mm Cable mm L Connetor I-PEX Plug, for 0.81,1.13,1.32,1.37mm Cable PCS 2	RF Cable 0.81,1.13,1.32,1.37mm Cable mm L Connetor I-PEX Plug, for 0.81,1.13,1.32,1.37mm Cable PCS 2 IPEXCAB - XXXX







UNITS: mm		SHEET SIZE:	ISO A4	SCALE:		
> 0 ~ 3	;	> 3 ~ 18	> 18 ~ 5	0	> 50 ~ 120	-
± 0.12		± 0.15	± 0.3		± 0.5	

I prodotti e le caratteristiche possono cambiare senza preavviso. The products and their features may change without notice.

RF COAXIAL CABLE