

**Material:**

Connector: Nylon+GF

Contact: Female Brass with Gold plated  
Specification:

Current Rating: 15A (Pin size 2.0mm)

Voltage Rating: 250V AC

Contact Resistance: <10mohm

Insulation Resistance: 100Mohm at 500V/DC


Breakdown Voltage: 500V/1Minute 2mA

Temperature Rating: -40 +105

Waterproof rating: IP67

MAX. Cable OD: 3,5mm <12.5mm

Durability(Plug/Unplug): 2000times

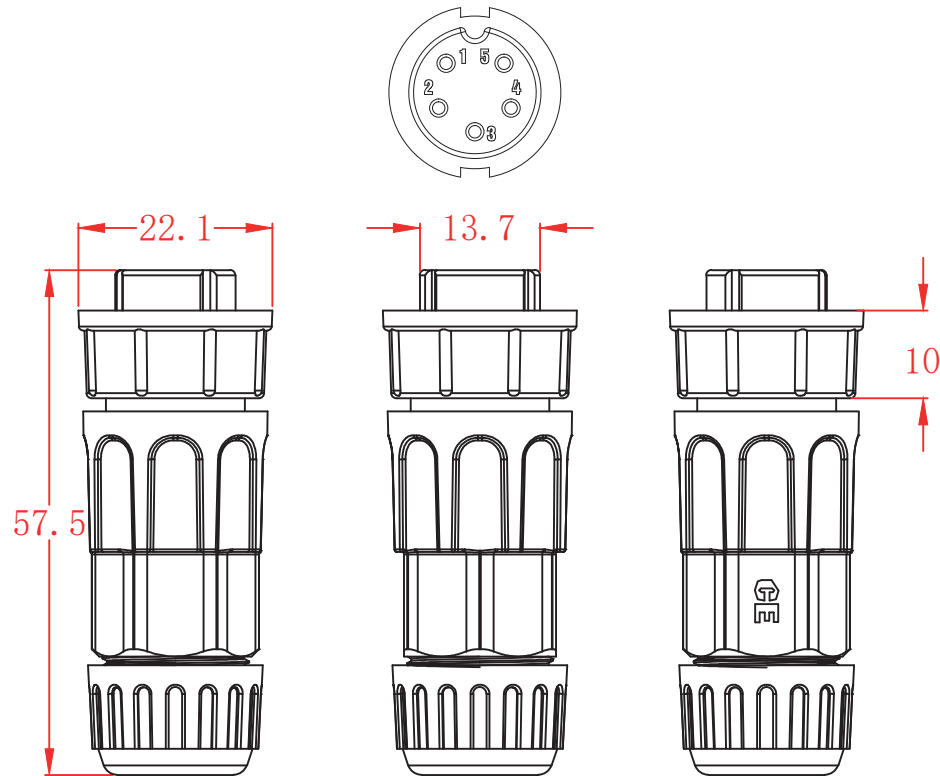

**X=OD**

<b>0</b>	OD 5,0mm
<b>1</b>	OD 6,0mm
<b>2</b>	OD 7,2mm
<b>3</b>	OD 7,5mm
<b>4</b>	OD 8,0mm
<b>5</b>	OD 8,5mm
<b>6</b>	OD 9,0mm
<b>7</b>	OD 10,0mr
<b>8</b>	OD 10,5mr
<b>9</b>	OD 11,0mr
<b>13</b>	OD 13,0mr

pn: **C19Q-05FVD07C-X**



**euro-conn**



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

**C19Q-05FVD07C**