


Electrical Specifications

Impedance: 50 Ω nominal
 Frequency Range: 0-4 GHz with low reflection
 Voltage Rating: 500 volts peak
 Dielectric Withstanding Voltage: 1,500 volts rms
 VSWR : Straight connectors: 1.3 max 0-4 GHz
 Right angle connectors: 1.35 max 0-4 GHz
 Contact Resistance
 Center contact: 1.5 mΩ;
 Outer contact: 0.2 mΩ
 Insulation Resistance: 5,000 MΩ
 Braid to Body: 0.1 milliohm
 RF Leakage: -55 dB min at 3 GHz
 Insertion Loss: 0.2 dB min at 3 GHz
 Temperature Range: - 65°C to + 165°C

Material

Male Contact: Brass
 Female Contact: Beryllium copper or phosphorous bronze,
 silver or gold-plated
 Other Metal Parts: Brass, nickel finish
 Insulator: TFE
 Crimp Ferrule: Copper/brass

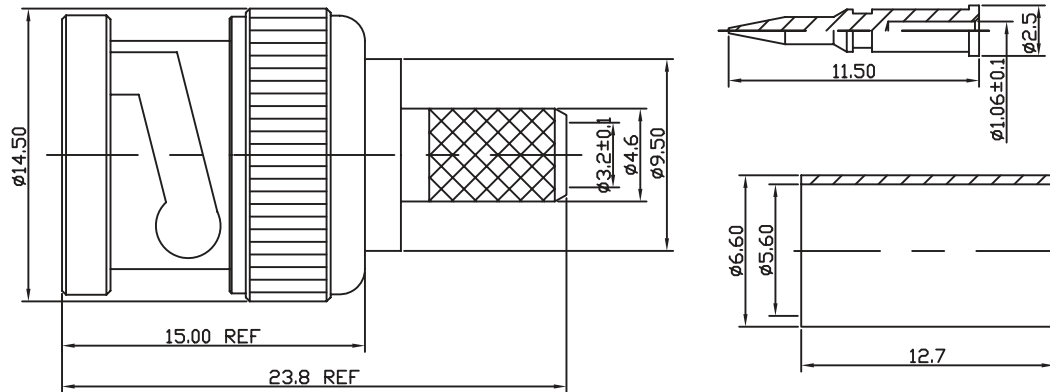

General description of ordering code

FAMILY	MODEL	TYPE	VERSION	OHM	CABLE	
BNC	60	-	J	D	5 [50 ohm] 7 [75 ohm]	XXX [RG cable]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
 The products and their features may change without notice.

RF COAXIAL