
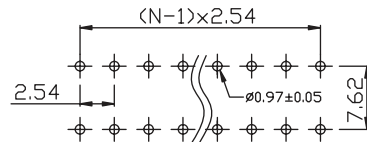





Pos.	A
2	6,02
3	8,56
4	11,1
5	13,64
6	16,18
7	18,72
8	21,26
9	23,8
10	26,34
11	28,88
12	31,42




PCB LAYOUT

### SPECIFICATIONS

Mechanical life: 2000 operations per switch  
 Operation Force : ≤9.8N max.  
 Stroke:2.0mm  
 Operation Temp:-20°C~+70°C  
 Electrical life: 2000 operations per switch-24 VDC, 25mA  
 Contact Resistance: 50m max. at initial  
 Non-Switching Rating: 100mA, 50VDC  
 Switching Rating: 25mA, 24VDC  
 Circuit: Single pole single throw

Soldering and Cleaning Processes  
 Keep all switch contacts in their "OFF" position for all operations

### Schematic

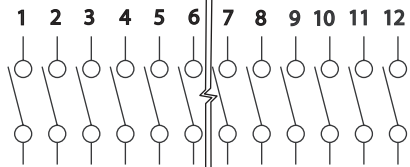

### General description of ordering code

FAMILY	POSITIONS	TYPE	VERSION	OPTION	PACKAGE
<b>EC7</b>	<b>XX</b>	<b>KM</b>	<b>N</b> [color black]	<b>0</b> [sealed]	<b>T</b> [tube]
		<b>KMR</b>		<b>1</b> [no sealed]	<b>R</b> [reel]



**euro-conn**



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
 The products and their features may change without notice.

**DIP SWITCH**