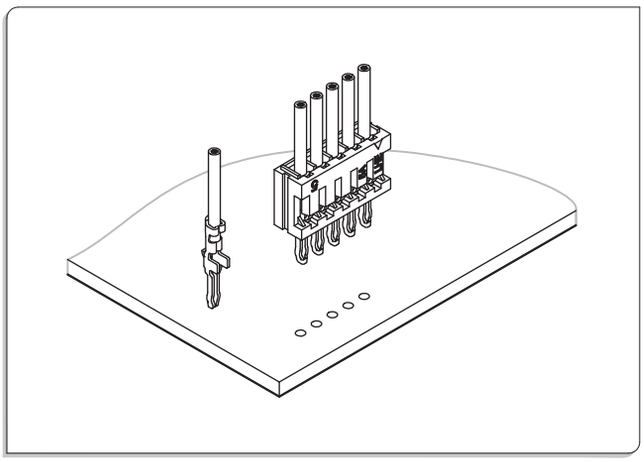

Specifications

1、Poles：2 to 20P
2、Current rating：0.7A AC,DC
3、Voltage rating：50V AC,DC
4、Temperature range：-25℃ to +85℃
(Including temperature rise in applying electrical current)
5、Insulation resistance：≥ 500MΩ
6、Withstanding voltage：500 V AC/minute
7、Applicable wire：AW G #30 to #26
8、Applicable PC board thickness：0.6~1.2mm

HOUSING

Material：Nylon 66 UL94V-0

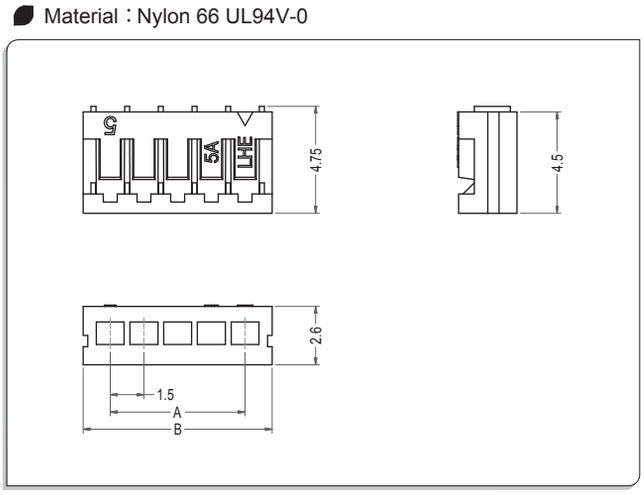

Poles	Part No.	DIM=A	DIM=B
2	WE150-02HS	1.50	3.90
3	WE150-03HS	3.00	5.40
4	WE150-04HS	4.50	6.90
5	WE150-05HS	6.00	8.40
6	WE150-06HS	7.50	9.90
7	WE150-07HS	9.00	11.40
8	WE150-08HS	10.50	12.90
9	WE150-09HS	12.00	14.40
10	WE150-10HS	13.50	15.90
11	WE150-11HS	15.00	17.40
12	WE150-12HS	16.50	18.90
--	-- --	--	--
20	WE150-20HS	28.50	30.90

TERMINAL

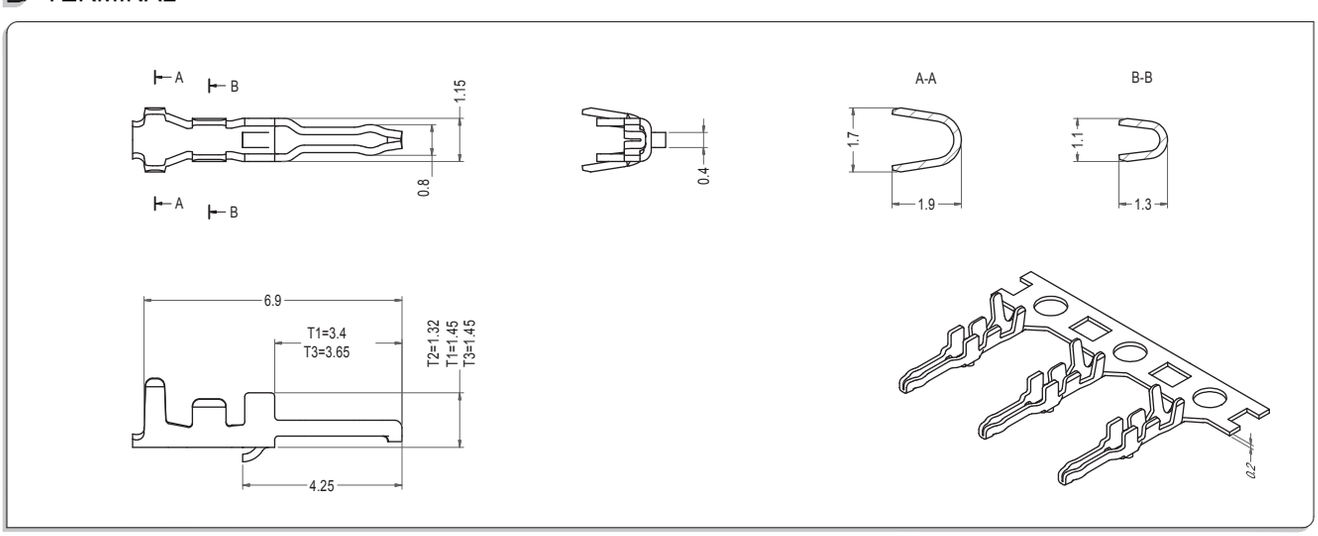

Part No.	Section Area mm	Wire Range	Insulation O.D	Material	Finish	Qty/reel
WE150-T2	0.05 to 0.08	AWG #30 to #26	0.7 to 1.1mm	Phosphor bronze	Tin-plated	8,000pcs
WE150-T1	0.05 to 0.08	AWG #30 to #26	0.7 to 1.1mm	Phosphor bronze	Tin-plated	8,000pcs
WE150-T3	0.05 to 0.08	AWG #30 to #26	0.7 to 1.1mm	Phosphor bronze	Tin-plated	8,000pcs

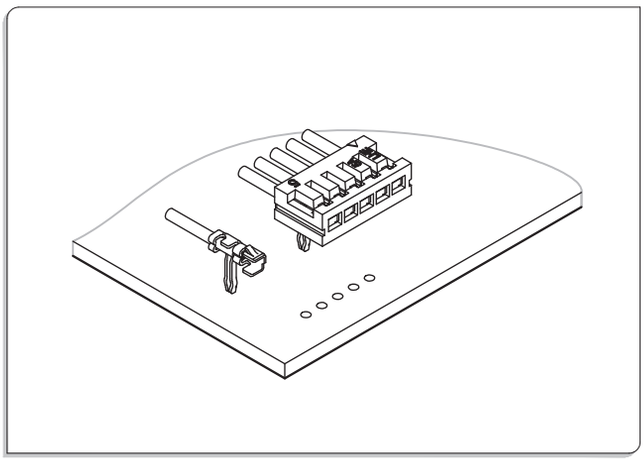

Specifications

1、Poles：2 to 20P
2、Current rating：0.7A AC,DC
3、Voltage rating：50V AC,DC
4、Temperature range：-25℃ to +85℃
(Including temperature rise in applying electrical current)
5、Insulation resistance：≥ 500MΩ
6、Withstanding voltage：500V AC/minute
7、Applicable wire：AWG #30 to #26
8、Applicable PC board thickness：0.6~1.2mm

HOUSING

Material：Nylon 66 UL94V-0

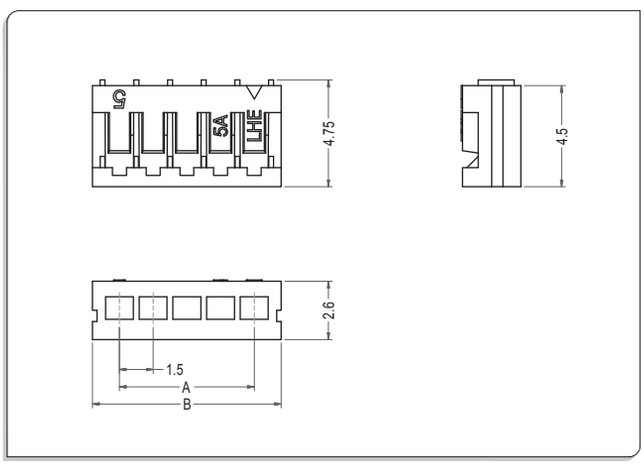

Poles	Part No.	DIM=A	DIM=B
2	WE150-02HR	1.50	3.90
3	WE150-03HR	3.00	5.40
4	WE150-04HR	4.50	6.90
5	WE150-05HR	6.00	8.40
6	WE150-06HR	7.50	9.90
7	WE150-07HR	9.00	11.40
8	WE150-08HR	10.50	12.90
9	WE150-09HR	12.00	14.40
10	WE150-10HR	13.50	15.90
11	WE150-11HR	15.00	17.40
12	WE150-12HR	16.50	18.90
--	-- --	--	--
20	WE150-20HR	28.50	30.90

TERMINAL

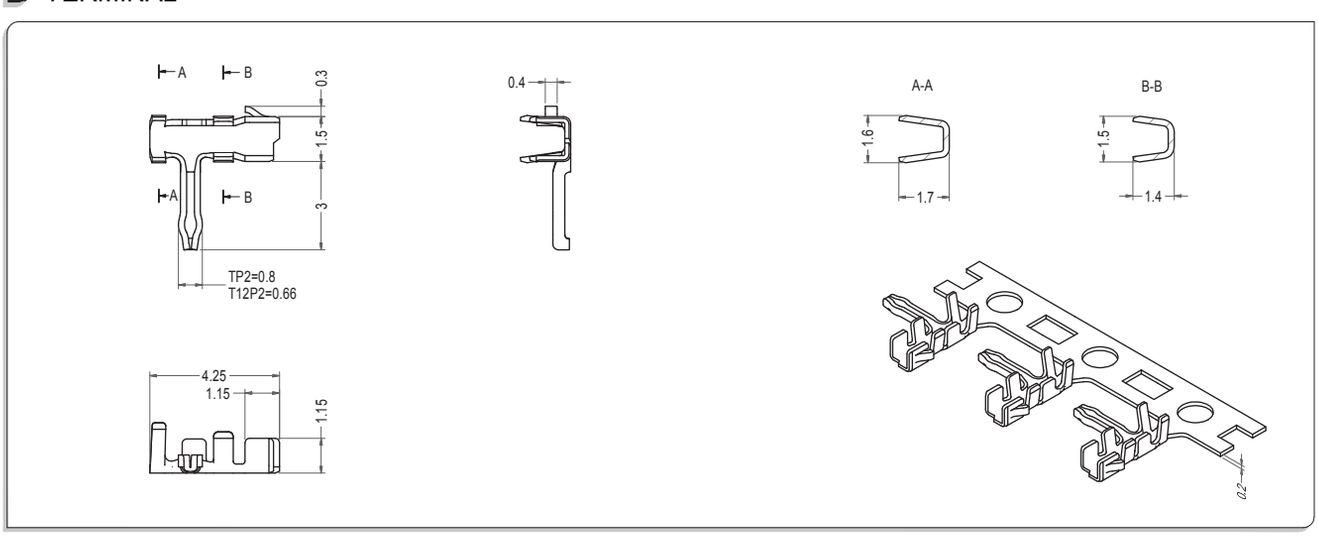

Part No.	Section Area mm	Wire Range	Insulation O.D	Material	Finish	Qty/reel
WE150-TTR	0.05 to 0.08	AWG #30 to #26	0.7 to 1.1mm	Phosphor bronze	Tin-plated	10,000pcs
WE150-TTR1	0.05 to 0.08	AWG #30 to #26	0.7 to 1.1mm	Phosphor bronze	Tin-plated	10,000pcs