
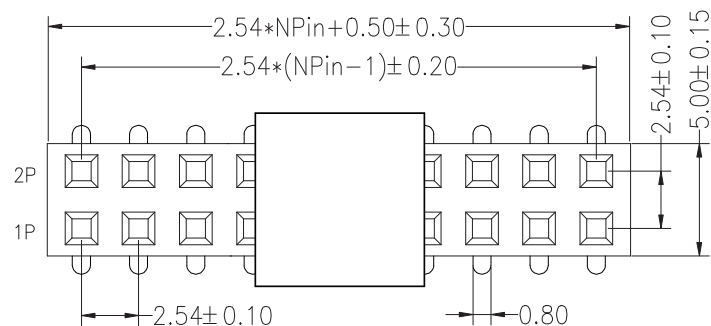
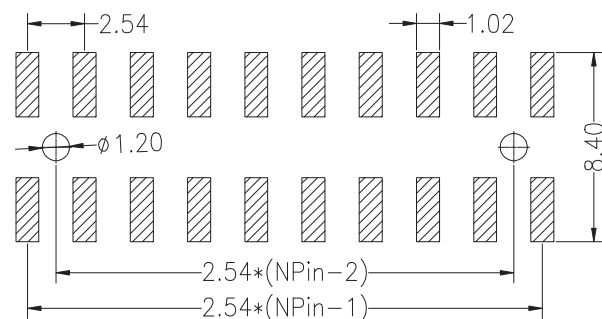



2x2P With This Cap
2x2P-Specific cover

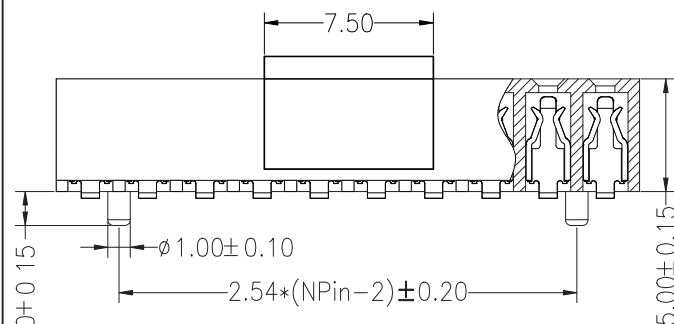

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	POST	PACKAGE
FH	254	2	XX	M [SMD straight]	F [flash gold]	053	00 [Standard]	0 [without]	T [tube]
								P [with]	R [reel]
									W [reel + caps]

SPECIFICATIONS

Rated Current: 3.0AMP

Contact Resistance: 20m Ω Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MQ Min

Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze

Contact Plating: Au Over Ni

Insulator Material: Polyester(UL94V-0)

Max.Processing Temp:

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second



euro-conn



FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

FEMALE HEADER