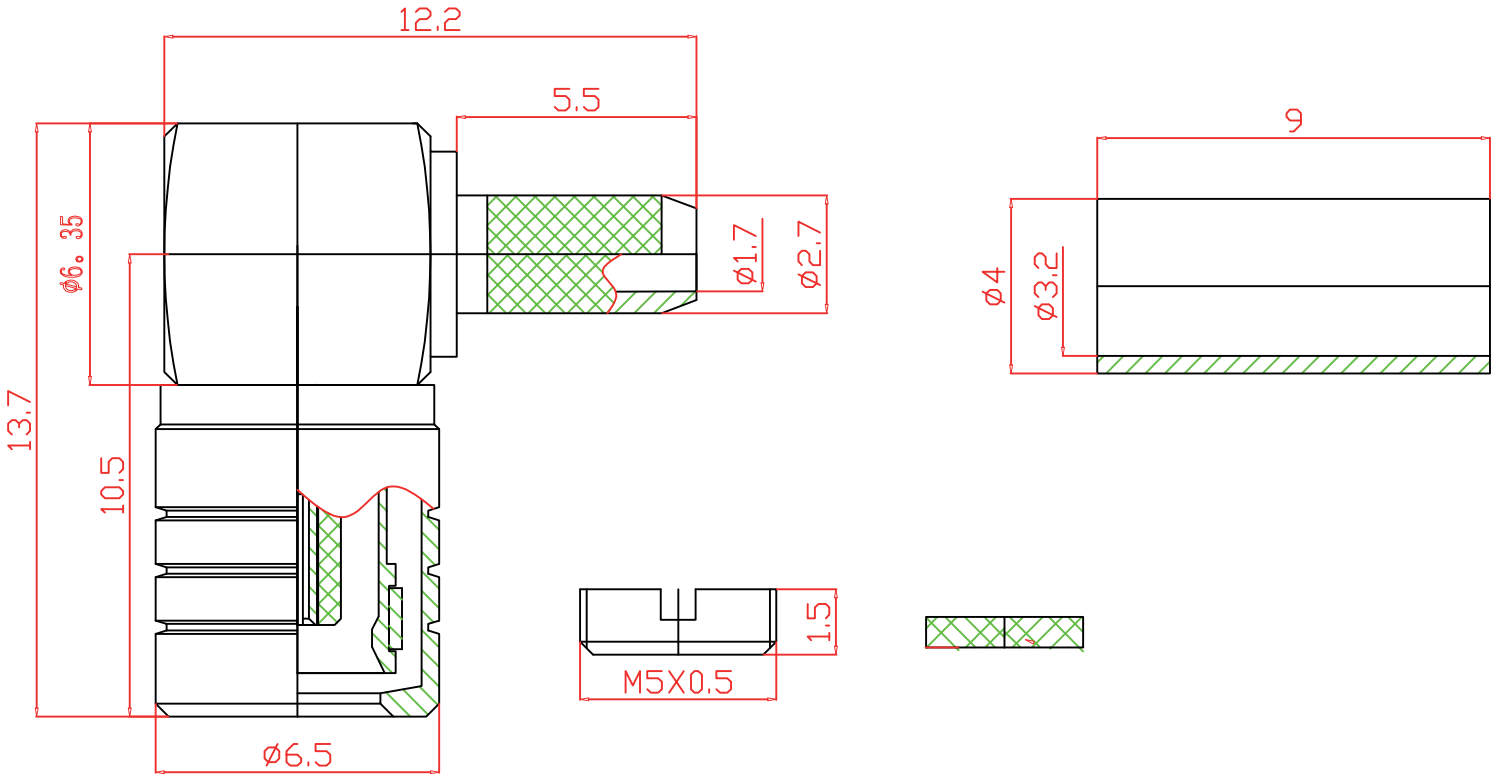

Tecnical Specifications		
①	Impedance	50 Ω
②	Frequency	0-6000MHz
③	VSWR	1.35 MAX
④	Temp.range	-55~+155°C
⑤	Working Voltage	335 V Max
⑥	Withstand Voltage	1000V rms
⑦	Durability	≥500 cycles

Material & Plating			
	Item	MATERIAL	PLATING
⑧	Body	Brass	Gold
⑨	Insulator	PTFE	
⑩	PIN	Brass	Gold
⑪			
⑫			
⑬			

General description of ordering code

FAMILY	MODEL		TYPE	VERSION	OPTION	CABLE
SMB	**60**	**-**	**P**	**R**	**0**	**XXX** [RG cable]

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

RF COAXIAL