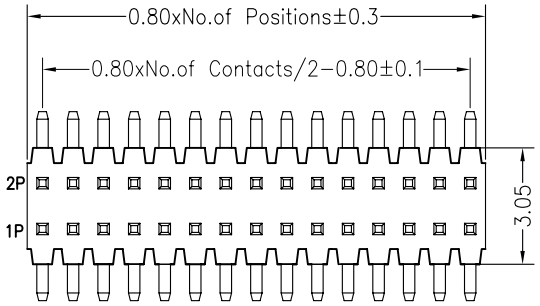

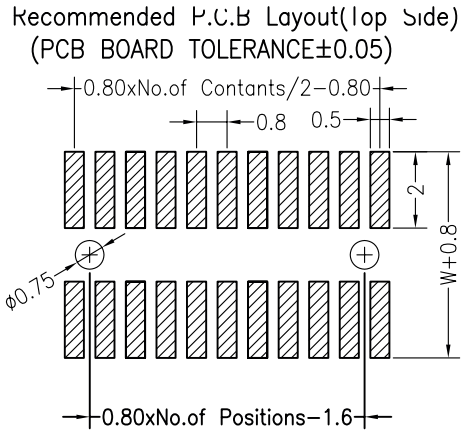

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

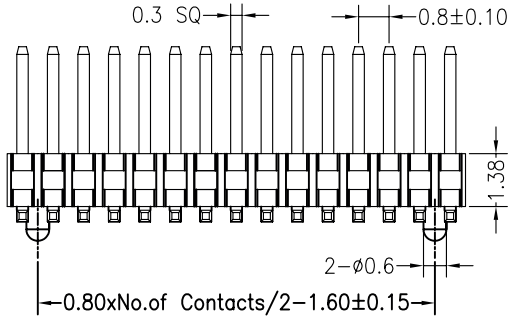



O = W/O Post



P = With Post

Dimension antitheses list			
ITEM	A	B	W
Standard	2.80	1.80	4.60
Alternate			

FAMILY	PITCH		N°ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	INSULATOR	SP_code*	POST	SPECIAL	PACKAGE
PH	080	-	2	XX	M [SMT straight]	F [flash gold]	YYY [A]	A [mm1,38 insulator]	--	0 [w/o]	0 [standard]	T [tube]
										P [with post]		W [reel+cap]

*SP_code=Alternate version

euro-conn

RoHS Compliant Lead Free

c UL us FILE N. E356435

UNITS: mm	SHEET SIZE: ISO A4	SCALE:	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

First angle projection

HEADER