

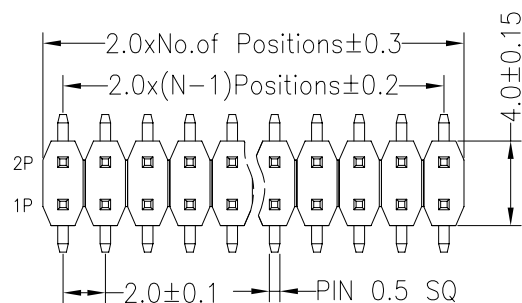

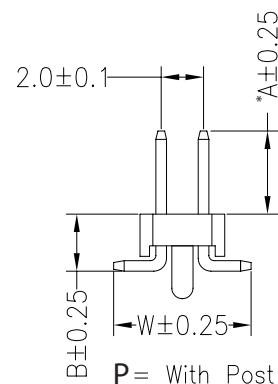


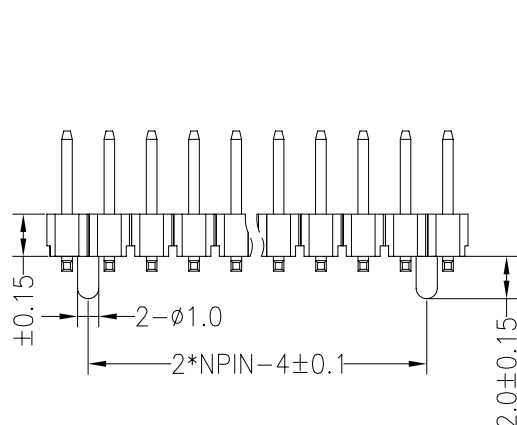

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

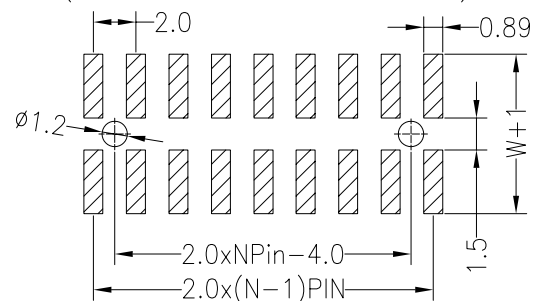

0 = W/O Post

P = With Post

SPECIFICATIONS

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to +105°C

Contact Material: Brass

Contact Plating: Au or Sn Over Ni


Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list			
ITEM	* A	B	W
Standard	4.00	2.70	6.50
Alternate			

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT*	OPTION	SP_code*	PCB LAYOUT	SPECIAL	PACKAGE
PH	200	2	XX	M [SMD straight]	F [flash gold]	YYY [heightA]	F [isol. 2,0]	--	0 [without PEG]	0 [standard]	T [tube]
*SP_code=Alternate custom											R [reel]
							C [isol. 1,5]		P [PEG]		V [tray / bag]
											W [reel+caps]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

PIN HEADER