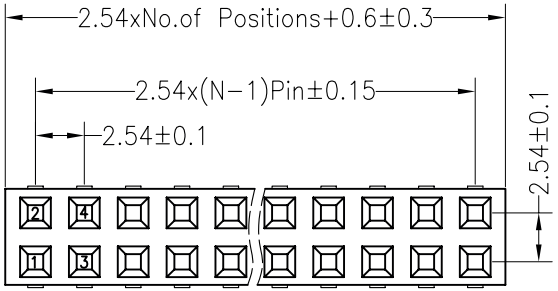

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

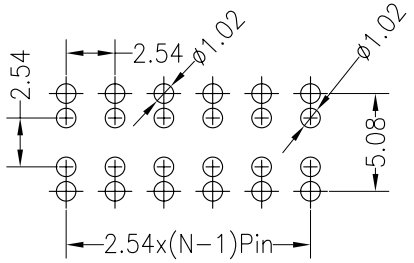

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

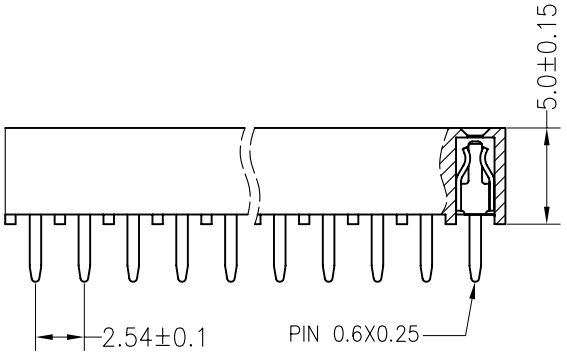

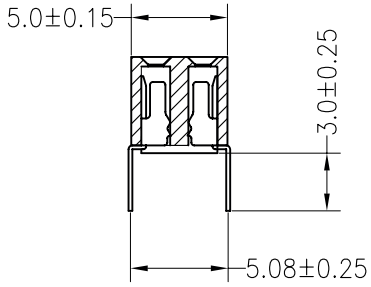

Come Ordinare:

FAMILY	PITCH		N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE
FH	**254**	-	**2**	**XX**	**D** [THT straight]	**F** [flash gold]	**050**	**02** [Standard]	**T** [tube]

euro-conn	**UNITS:** mm	**SHEET SIZE:** ISO A4	**SCALE:**	First angle projection
	> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
	± 0.12	± 0.15	± 0.3	± 0.5
				FEMALE HEADER