



TYPE1


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

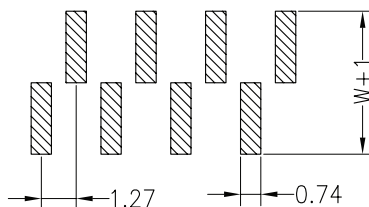



TYPE1

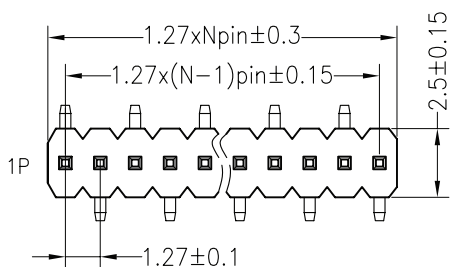

TYPE2

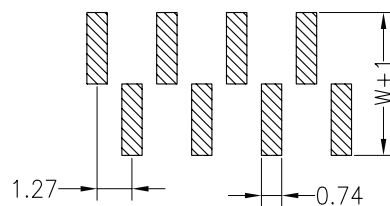

TYPE2

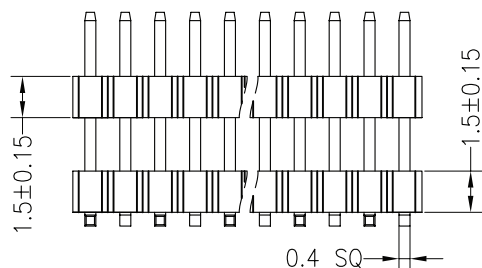

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list					
ITEM	A	B	D	W	L
Standard	1.80	4.50	0.10	5.50	8.60
Alternate					

General description of ordering code

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	INSULATOR	SP_CODE	OPTION	TYPE	PACKAGE
PH	127	1	XX	M [straight]	F [flash gold]	XXX [length A+B]	K [thickness mm 1,5]	XX	0	1	T [tube]
SP_code=Alternate custom										2	W [reel+caps]
											V [tray]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

UL E356435

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

HEADER