

Euro-conn

product specification

Specification

Current Rate: 1.0 AMP

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 20m Ω Max.

Withstanding Voltage: 500V AC for one minute

Operation Temperature: -40 °C to +105 °C





Material

Insulator: Polyester, Nylon 46 + 30% G.F, UL 94V-0

Terminal: Copper Alloy

Plated: Tin Plated

No. of Contacts	Dimension		
	A	B	C
04	9.70	3.81	5.60
06	12.24	6.35	8.14
08	14.78	8.89	10.68
10	17.32	11.43	13.22
12	19.86	13.97	15.76
14	22.40	16.51	18.30
16	24.94	19.05	20.84
18	27.48	21.59	23.38
20	30.02	24.13	25.92

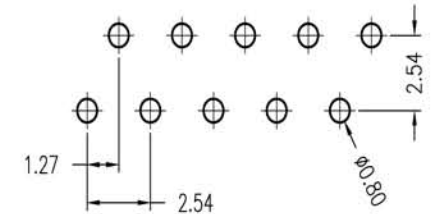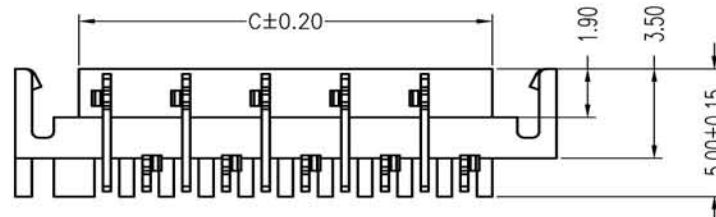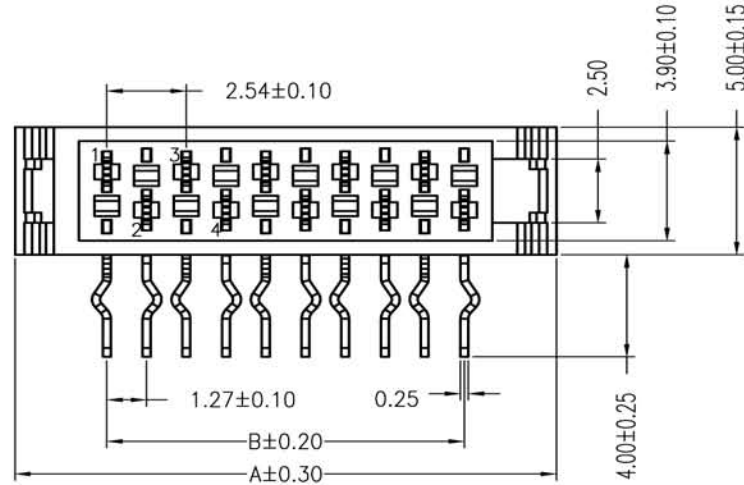

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

ORDER INFORMATION:

MTF - **XX** **RTM1**

No Pin

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION
Euro-conn					
					MINI-MATCH