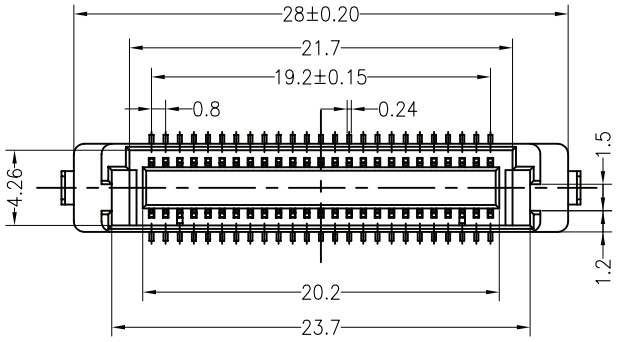

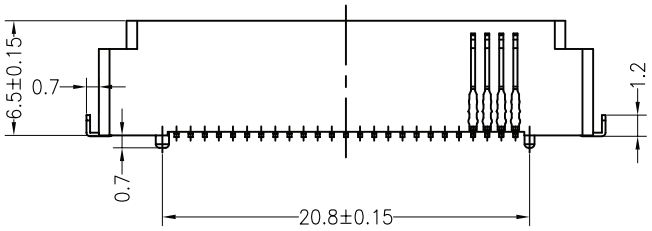

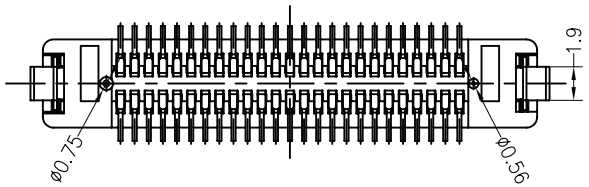



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

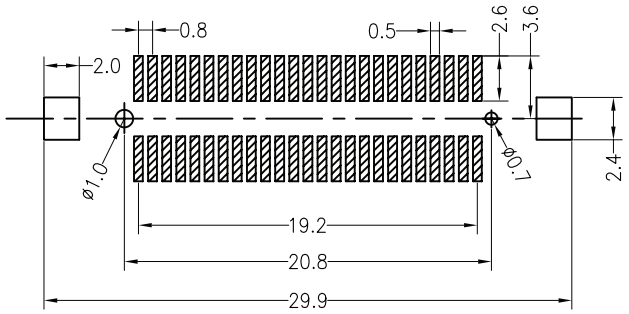

SPECIFICATIONS
PERFORMANCE
Electical Rating: AC/DC 50V 0.5A
Insulation Resistance: 500MΩ
Withstang Volt: 200V AC/minute
Opratng Temperature: -40°to+105°
Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

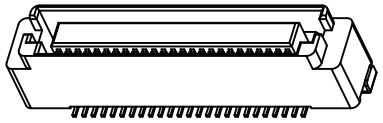

General description of ordering code

FAMILY	PITCH		N° PIN	VERSION	MODEL	PLATING	HEIGHT	PEG	PACKAGE
STS	080	-	XXX	M [straight]	P [plug]	F [gold flash]	065 [Standard]	1 [Standard]	V [tray]
						G [gold 5u']			T [tube]
						D [gold 15u']			R [reel+cap]

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

BOARD TO BOARD