SPECIFICATIONS

Electical Rating: AC/DC 50V 0.5A
Insulation Resistance: 500MΩ
Withstang Volt: 200V AC/minute
Opratng Temperature: -40°to+105°
Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP

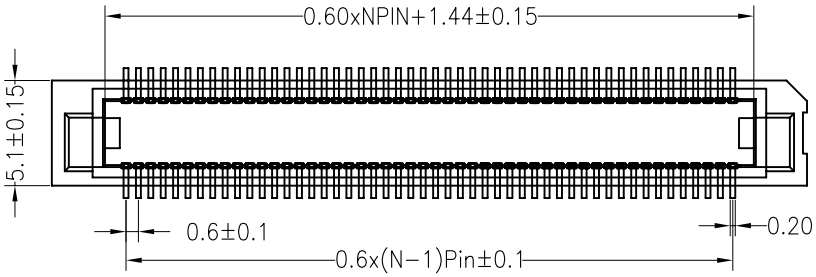



ASSEMBLY

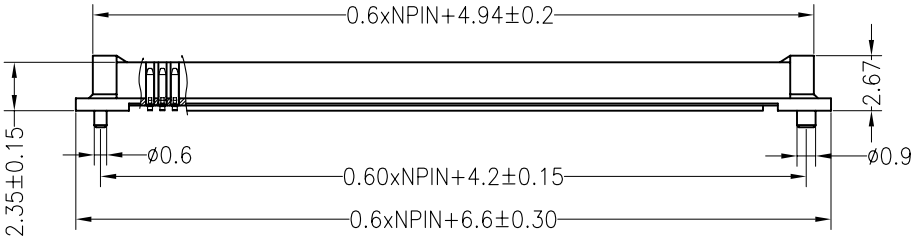



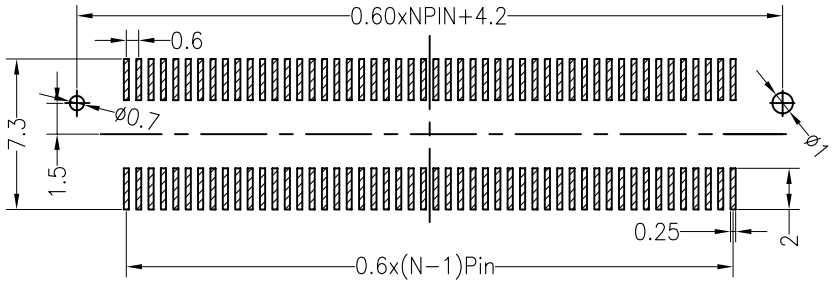

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOI FRANCF±0.05)

General description of ordering code

FAMILY	PITCH		N° PIN	VERSION	MODEL	PLATING	HEIGHT	PEG	PACKAGE
STS	060	-	XXX	F	P [Plug]	G [gold flash]	023	P [with PEG]	T [tube]
						C [gold 5u']			R [reel+cap]
						M [gold 15u']			

No Pins 60 =060
80 =080
100 =100

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE:	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

First angle projection

BOARD TO BOARD