Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(6 finger):	Beryllium copper(C17200)
Accepted pin:	Ø0.70 to 0.90mm,0.635mm
Forces:	(polished steel gauge Ø0.76mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS
Coplanarity SMD terminations:	max 0.1mm(measured on 25mm long connectors)

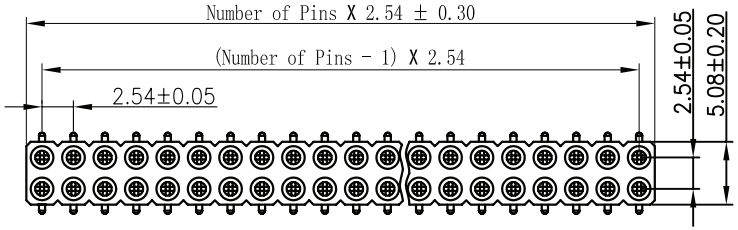

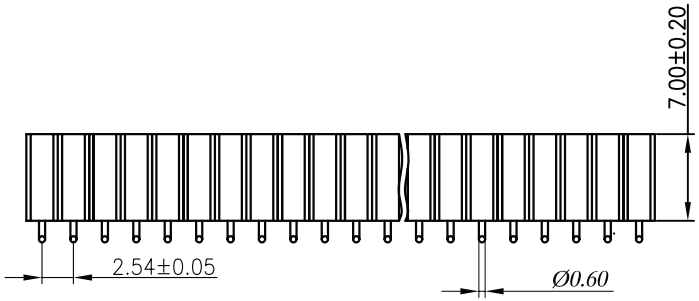



General description of ordering code

FAMILY	PITCH		N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	SPECIAL
FH	254	-	2	XX	M [SMT straight]	F [flash gold]	070--	00 [standard]	T [tube]	R [Round Pin]
						T [tin]				

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER