

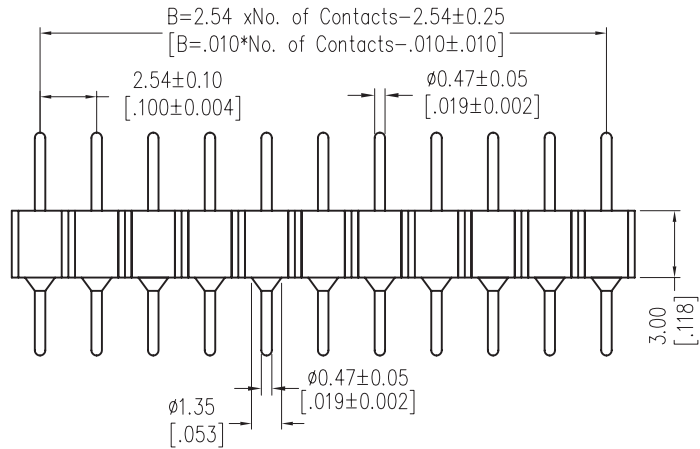


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

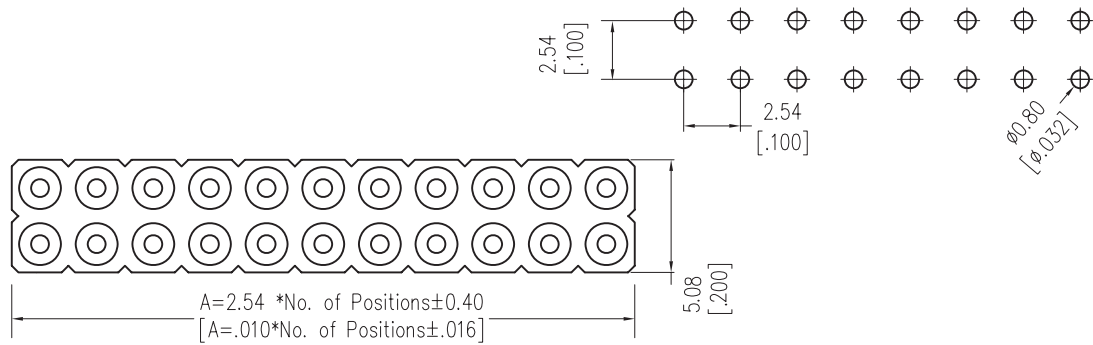

TECHNICAL SPECS:

Current Rating: 3.0AMP
Contact Resistance: 10mΩ Max
Dielectric Strength: Min 1000VRMS
Mechanical Life: Min 500 cycles
Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Connecting Pin: Ø0.47mm
Insulator Material: PPS+30%G.F(UL94V-0)

General description of ordering code

FAMILY	TYPE	N° ROW	N° PIN PER ROW	VERSION	CLIP PLATING	PIN LENGHT	PIN DIAMETER	PACKAGE	
ZM	0 [single row 2.54]	2	XX [1 ≤ XX ≤ 36]	D [straight]	F [flash gold]	100 [total length]	C [0.47/0.47mm]	T [tube]	
<table border="1"> <tr> <td>T [tin]</td> </tr> </table>									T [tin]
T [tin]									



UNITS: mm	SHEET SIZE: ISO A4		SCALE: ----
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER