D_sub - wire solder- contact stamped

CONSULT SALES OR FACTORY FOR OTHER MOUNTING STYLE OPTIONS

Dimensions

Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	19.20
15	39.20	33.30	25.25	24.70	19.39	27.70
25	53.05	47.04	38.96	38.40	33.24	41.10
37	69.40	63.50	55.42	54.80	49.86	57.30

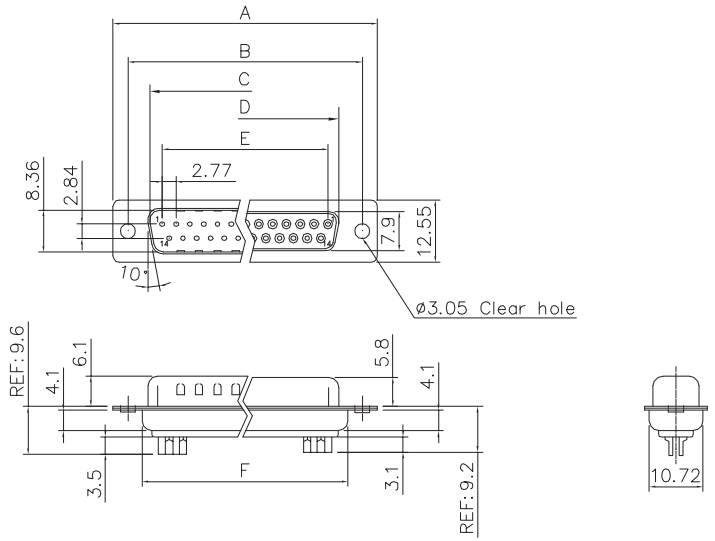

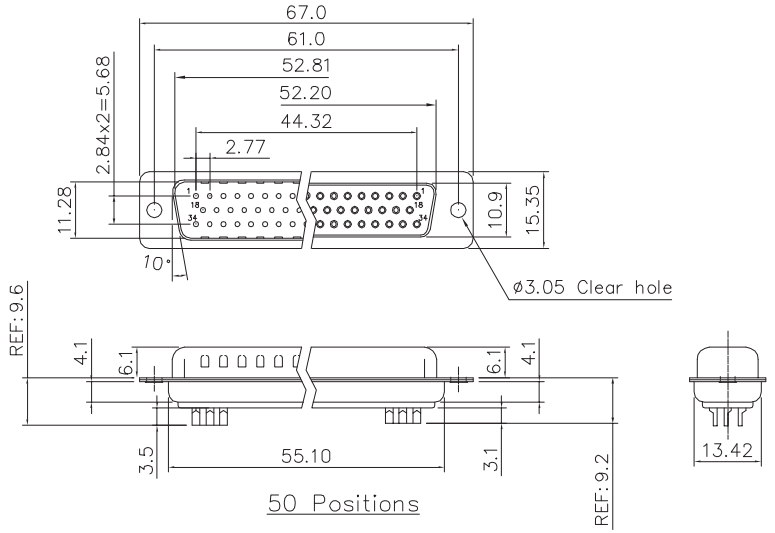

50 Positions

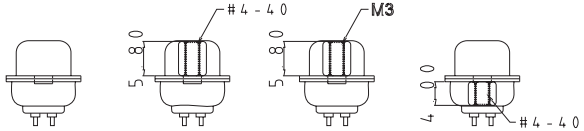

HH H2 H3 H4

General description of ordering code

FAMILY	MODEL	CONTACT TYPE		N° PIN	TYPE	CLIP PLATING	ACCESSORIES
DS	B	S	-	9	M [male]	F [flash gold]	HH [clear hole, 3 mm]
				15	F [female]	G [gold 15u"]	H2 [riveted threaded 4/40UNC]
				25		D [gold 30u"]	H3 [riveted threaded 3MA]
				37			H4 [riveted+rear nut 4/40]
				50			

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT,UL94V-0
Contact : Brass
Shell : Steel, 100u" Tin Over 50u" min Copper
Clinch Nut : Brass, Nickel Plated
Boardlock : Brass, Tin Plated
Screwlock : Brass, Nickel Plated

Electrical

Contact Resistance : 20 milliohms Max at 1 AMP DC.
Insulation Resistance : 1000 magohms at 500 VDC
Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
Current Rating :3 AMP
Volatge Rating : 250 VAC/rms 60Hz

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE:---	First angle projection
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

DSBS