D_sub - right angle - contact stamped

CONSULT SALES OR FACTORY FOR OTHER MOUNTING STYLE OPTIONS

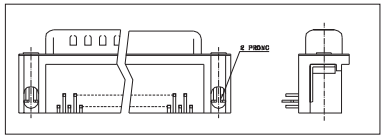

HH

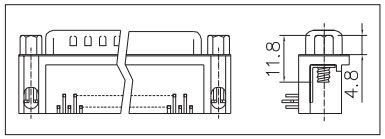

FS

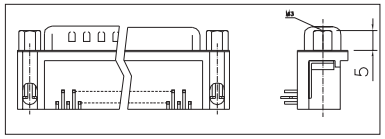

RM

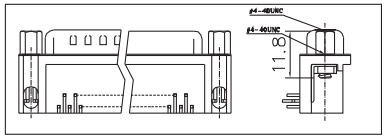

RS

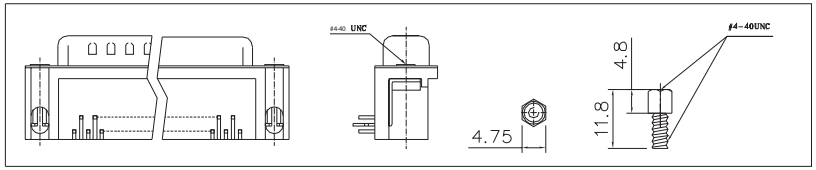

RF

Dimensions

Positions	A	B	C	D	E
9	30.81	24.99	16.92	16.33	11.08
15	39.20	33.30	25.25	24.70	19.39
25	53.05	47.04	38.96	38.40	33.24
37	69.40	63.50	55.42	54.80	49.86

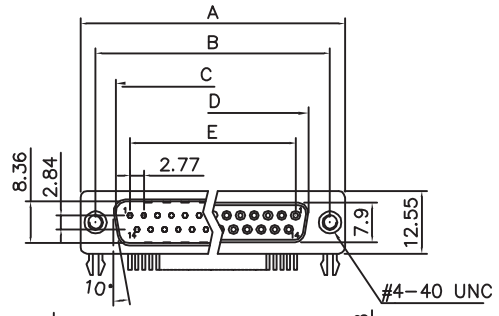

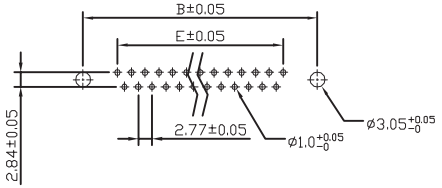

RECOMMENDED PCB LAYOUT

FEMALE\MALE



9.4mm Footprint

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
Contact : Brass
Shell : Steel, 100u" Tin Over 50u" min Copper
Clinch Nut : Brass, Nickel Plated.
Boardlock : Brass, Tin Plated.
Screwlock : Brass, Nickel Plated.

Electrical

Contact Resistance : 20 milliohms Max at 1 AMP DC.
Insulation Resistance : 1000 magohms at 500 VDC
Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
Current Rating : 3 AMP
Volatge Rating : 250 VAC/rms 60Hz

General description of ordering code

FAMILY	MODEL	CONTACT TYPE		N° PIN	TYPE	CLIP PLATING	PITCH - F -	PCB OPTIONS	ACCESSORIES
DS	D	S	-	09	M [male]	F [flash gold]	2 [pitch mm 10,30]	0 [Whitout Fork]	HH [clear hole]
				15	F [female]	G [gold 15u"]		1 [With Fork]	FS [screwlocks 4/40]
				25		D [gold 30u"]			RM [rivet + screws 3MA]
				37					RF [riveted 4/40]
									RS [rivet+screws4/40]

Approvals

c UL us E356435

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE:---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

First angle projection

D-SUB