D_sub HD - dip solder- contact stamped

CONSULT SALES OR FACTORY FOR OTHER MOUNTING STYLE OPTIONS

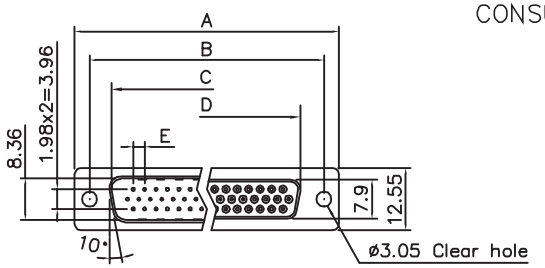

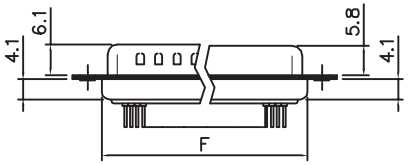



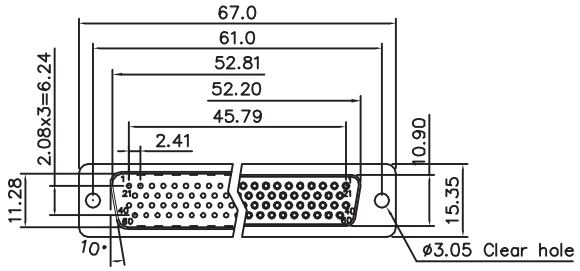

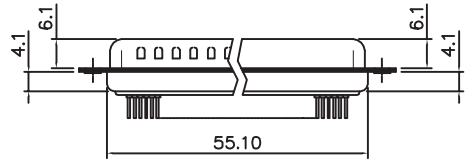

78 Posistions



DIMENSION TABLE

POSITIONS	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.20	33.30	25.25	24.70	2.29	27.70
44	53.05	47.04	38.96	38.40	2.29	41.10
62	69.40	63.50	55.42	54.80	2.41	57.30

Product Specification

Material

Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated
Contact :Brass
Shell : Steel, 100u" Tin Over 50u" min Copper
Clinch Nut: Brass, 100u" min Nickel Plated.
Screwlock :Brass, 100u" min Nickel Plated.

Electrical

Contact Resistance :20 milliohms Max at 1 AMP DC.
Insulation Resistance :1000 magohms at 500 VDC
Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute
Current Rating :3 AMP
Volatge Rating :250 VAC/rms 60Hz


HH



H2



H3



H4



CB



CD

General description of ordering code

FAMILY	*MODEL*	*CONTACT TYPE*		*N° PIN*	*TYPE*	*CLIP PLATING*	*ACCESSORIES*
DH	**A**	**S**	-	**15**	**M** [male]	**F** [flash gold]	**HH** [clear hole, 1 mm]
				26		**G** [gold 15u"]	**H2** [riveted threaded 4/40UNC]
				44	**F** [female]	**D** [gold 30u"]	**H3** [riveted threaded 3MA]
				62			**H4** [riveted+rear nut 4/40]
				78			**CB** [boardlock]
							CD [boardlock + 4/40UNC]

Approvals

c UL us E356435

euro-conn

RoHS Compliant Lead Free

UNITS: mm	**SHEET SIZE:** ISO A4	**SCALE:---**	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

First angle projection

DHAS