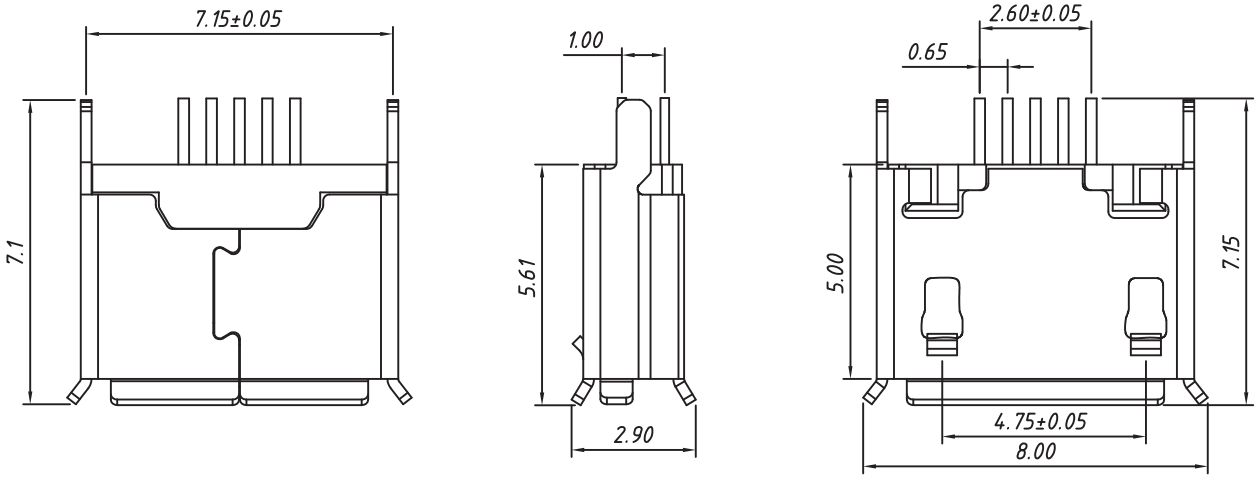

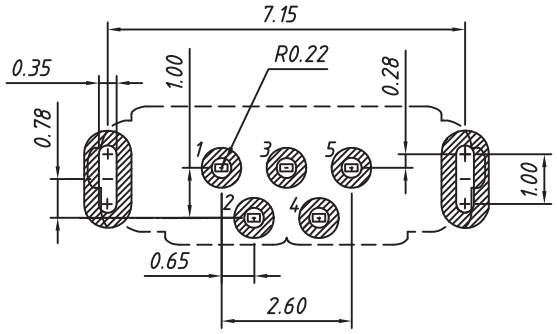

RECOMMENDED PCB LAYOUT
THICKNESS : 1.0 mm

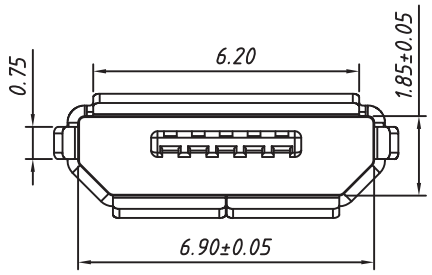

Material

Housing:LCP,UL 94 V-0,Black.
Contact:Copper Alloy.Gold
Contact Type: Stamped
Shielding: Stainless Steel Matt Tin Plated.

Electrical:

Current Rating:1.8 A Pin1 & Pin 5
1.0 A Other Pins
Voltage Rating:30V DC
Contact Resistance:30mΩ Max.
Withstanding Voltage: 100 Vac/Min.
Insulation Resistance:1000MΩ Min.
Operating Temperature: -40°C Up To +85°C
Compliance: Lead Free And Rohs

euro-conn

RoHS Compliant Lead Free

UNITS: mm		**SHEET SIZE:** ISO A4		**SCALE:**	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	Rev. n.01 13/06/2018	
± 0.12	± 0.15	± 0.3	± 0.5		

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MUSB-N05DFNT