Technical parameters:

Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C ~ 70°C

Material:

Housing Material:PBT
Center Pin Material:
Terminal 1 :Brass
Terminal 2 :Copper Alloy
Terminal 3 :Brass
Bushing :Brass

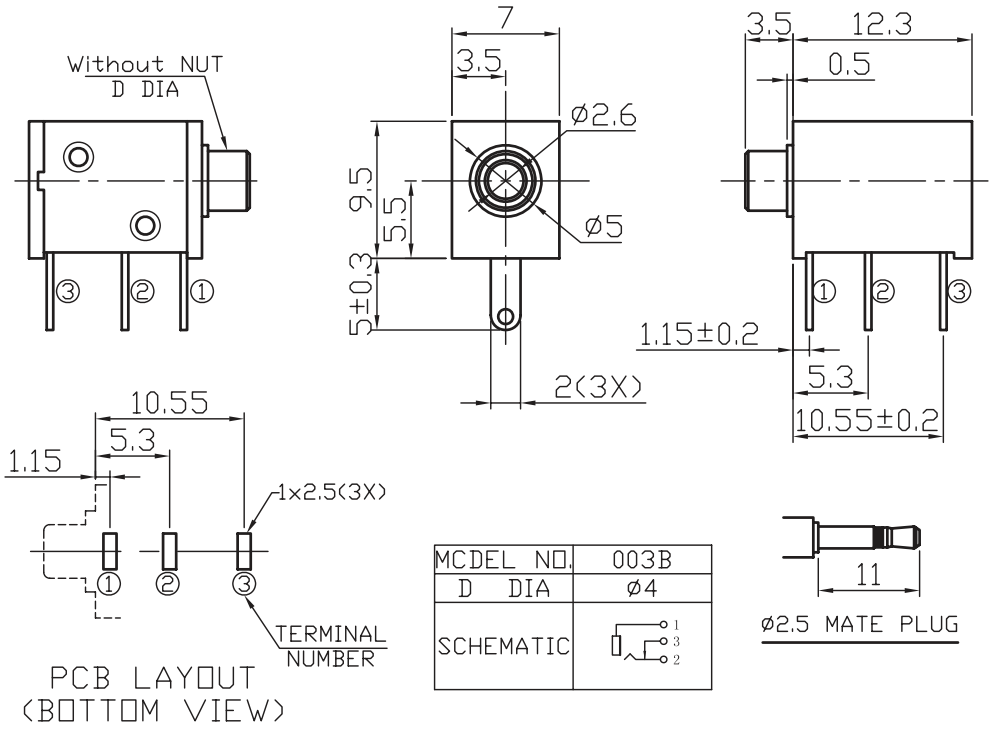

General description of ordering code

FAMILY		VERSION	TYPE	MODEL	OPTION
EU1	-	TG	25	003	A [with nut]
					B [without nut]

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

AUDIO VIDEO