Technical parameters:

Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C ~ 70°C

Material:

Terminal 1 : Cold Rolled Steel
Terminal 2 : Copper Alloy
Terminal 3 : Copper Alloy
Terminal 10: Brass
Terminal 11: Brass
Bushing : Brass
Spring : Copper Alloy
Housing : PBT
Cover : PTB

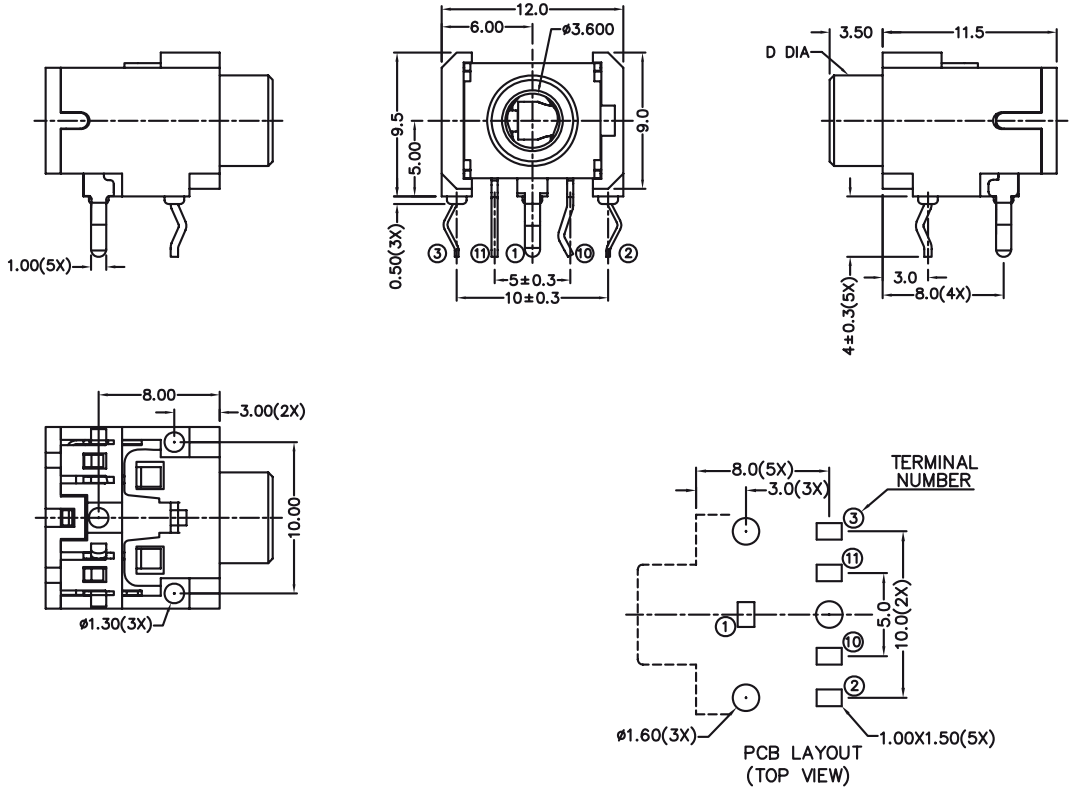



General description of ordering code

FAMILY		VERSION	TYPE	MODEL
	-	TSJ	35	003A
				003AA
				003AB
				003AC
				003AD

With NUT	M6X0.5	MODEL NO.	TSJ3.5-003A	TSJ3.5-003AA	TSJ3.5-003AB	TSJ3.5-003AC	TSJ3.5-003AD
D DIA		SCHEMATIC					

Dip Stereo Jack

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

AUDIO VIDEO