Technical parameters:

Technical parameters:
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Rated Load: DC 50V 1A
Withstand voltage: 500V AC / 1 minute/50Hz
Insertion Force :5-40 N
Life: 5000 times
Operating Temperature:-30℃ ~ 70℃

Material:
Housing: PC
Contacts: copper

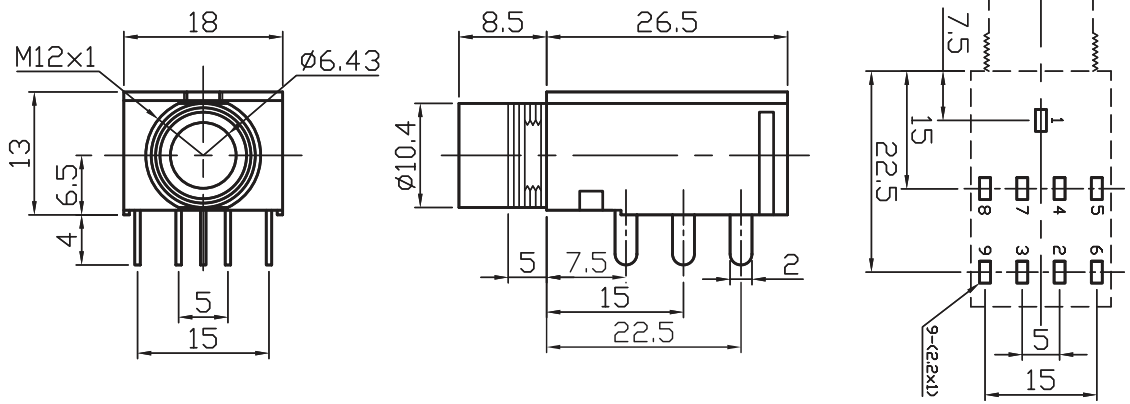

LAYOUT CONTACTS

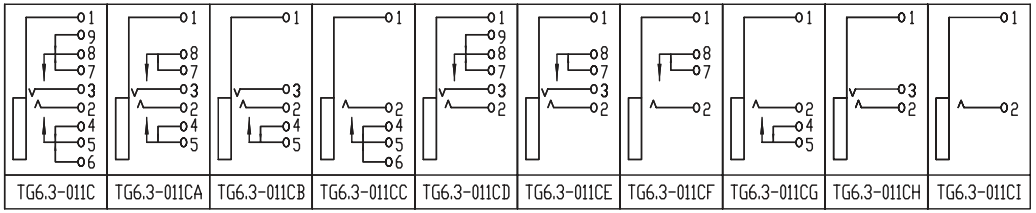

General description of ordering code

FAMILY	*MODEL*		*TYPE*	*LAYOUT*
EU1	**PJ**	-	**TG63**	**XXXXX**

euro-conn

RoHS Compliant Lead Free

UNITS: mm	**SHEET SIZE:** ISO A4	**SCALE:** ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

AUDIO JACK