Technical parameters:

Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C ~ 70°C

Material:

WASHER :IRON
HOUSING :PA66
CURVE PIECE/ NUT : C2680
CONTACT FOOT/ SPRING : C5191

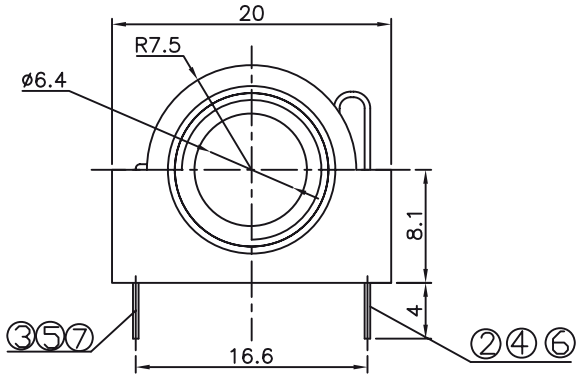

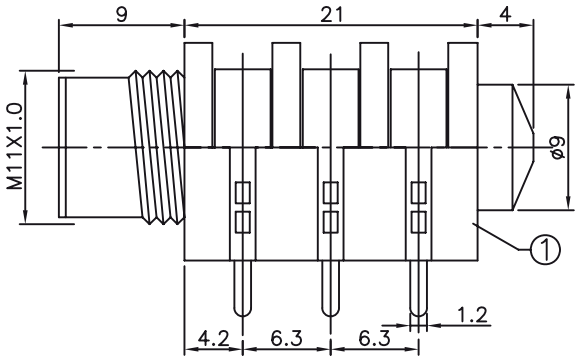

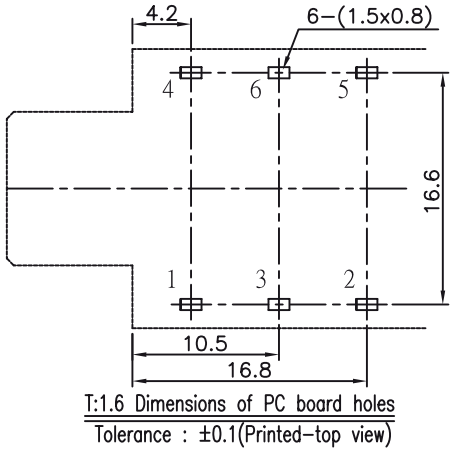

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

SCHEMATIC

TG6.3-006CA	TG6.3-006C	TG6.3-006CB	TG6.3-006CC
			

General description of ordering code

FAMILY		VERSION	TYPE	MODEL
EU1	-	TG	63	006CA
				006C
				006CB
				006CC

Dip Stereo Jack

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

AUDIO VIDEO