Electrical:

1.Rating:50mA 12V DC
2.Contact Resistance:100mΩ Max.
3.Insulation Resistance:100MΩ Min,100V DC
4.Dielectric voltage proof:250V AC for 1min
5.Electrically Life:100000 cycles Min.
6.Operating Force:250±50gf
7.Environment temperature:-30ºC~+80ºC

Materials:

A.Cards: Phosphor 0.15
B.Pedestal:LCP,Black
C.Shrapnel:Stainless steel
D:Waterproof membrane:0.05
E.Push button:LCP,Black
F.Cover:Stainlesss teel 0.1

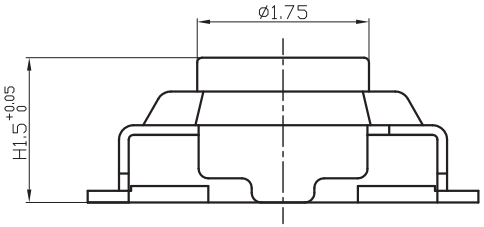

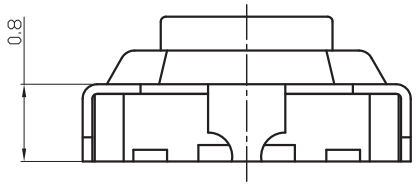

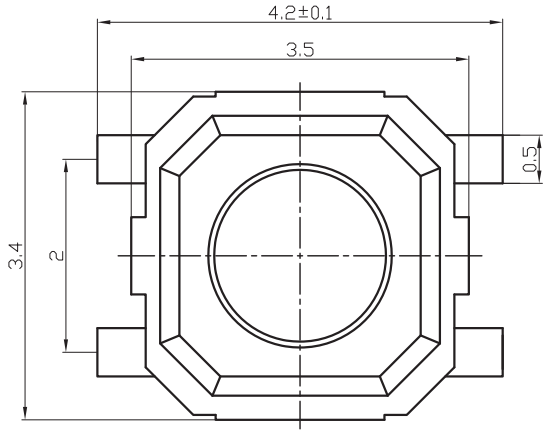



SCHEMATIC

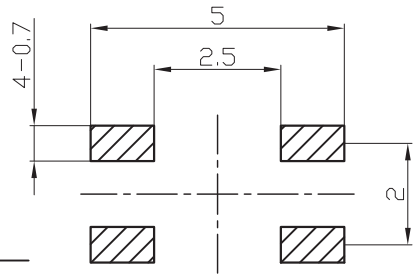

P.C.B layout



General description of ordering code

FAMILY		SIZE	HEIGHT	FORCE	OPTION
ECTM	-	3302	15	250 [gf]	B

3x3mm Tact Switch

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

TACTILE SWITCHES