SPECIFICATIONS:

CONTACT RATING: 5A 250VAC 10 125VAC.
ELECTRICAL LIFE: 10,000 Operations.
MECHANICAL LIFE: 50,000 Operations.
CONTACT RESISTANCE: <20m-ohms.
INSULATION RESISTANCE: >1,000M-ohms.
DIELECTRIC STRENGTHS: >1,500 volts 1min.
>3,000 volts between poles.

MATERIALS:

HOUSING: 66 Nylon(UL 94V-2).
ACTUATOR: 66 Nylon(UL 94V-2).
MOVABLE CONTACTS: Copper, silver plated.
STATIONARY CONTACTS: Copper, silver plated.
TERMINALS: Copper, silver plated.
CONTACT SPRING: Piano wire.

B



M4



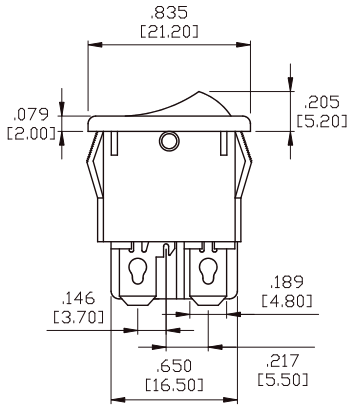

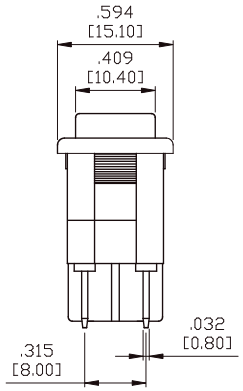





Model No.	Type
	ON-OFF
024	ON-OFF
	ON-OFF
	ON-OFF

Actuator and Housing Colors
B Black (Std.)

General description of ordering code

FAMILY		*MODEL*	*FUNCTION*	*MARKING*	*TERMINAL*	*ACTUATOR*	*BASE*
EC7	-	**024**	**1** [on - off]	**B** [0 - 1]	**M4** [0,8X4,7]	**B** [black]	**B** [black]

euro-conn

RoHS Compliant Lead Free

UNITS: mm	**SHEET SIZE:** ISO A4	**SCALE:** ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

ROCKER SWITCHES