Material:

Housing: PBT

Contacts: Phosphor Bronze, Tinning

Electrical Characteristics:

Insulator Resistance: 1000M Ohm min.

Contact Resistance: 30m Ohm max.

Dielectnic voltage: 500V AC

Operating Temperature: -25ºC~+85ºC

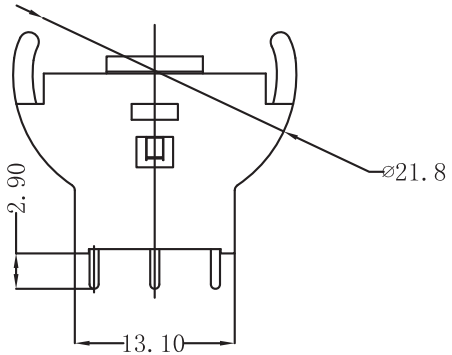









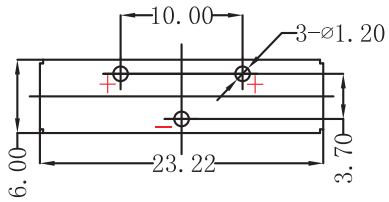

PCB Layout Diagram

Top View

General description of ordering code

FAMILY		MODEL	SIZE	TYPE
BS32	-	CR	2032	04

CR 2032 Coin Battery Holder

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.

The products and their features may change without notice.

COIN CELL HOLDER