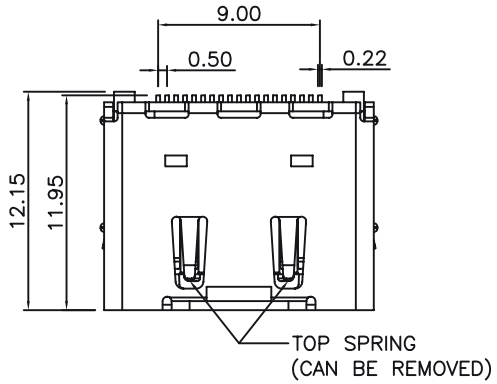

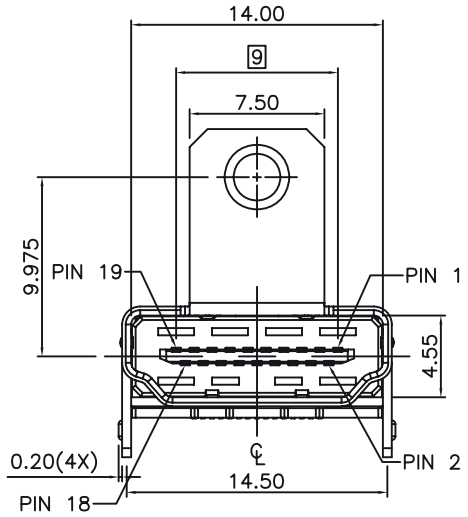

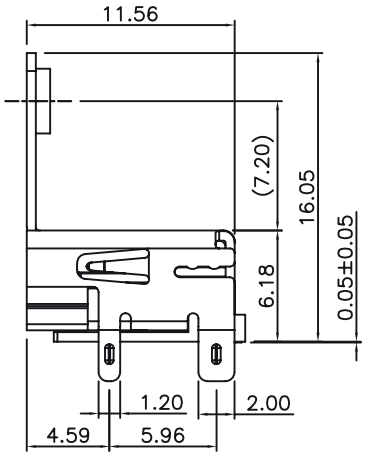

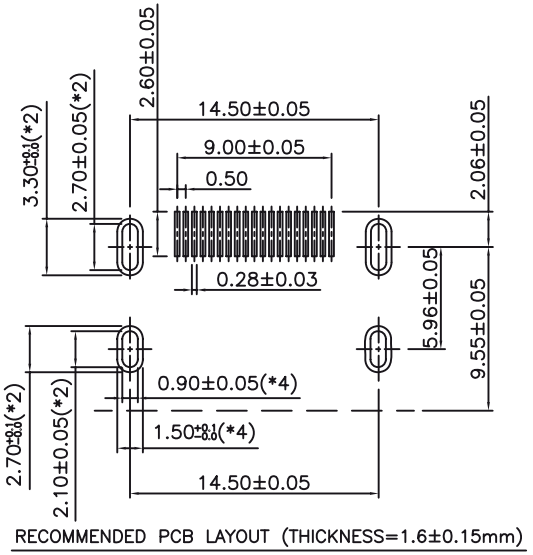

MATERIAL

Insulator : LCP, UL 94V-0, Black
Contact: Copper Alloy
Contact Finish : 30u" Gold On Mating End, Tin On Termination End,
With Entire Contact Nickel Underplated.
Shell-Copper Alloy, Nickel Plated

ELECTRICAL

Current Rating : 0.5A
Dielectric Withstanding Voltage : 40V AC Per Minute
Insulation Resistance : 100MΩ MIN
Contact Resistance : 30MΩ MAX
Operating Temperature : -20°C ~ +85°C

MECHANICAL

Insertion Force: 44.1 N Max.
Withdraw Force: 9.8 N Min.

euro-conn

RoHS Compliant Lead Free

UNITS: mm		SHEET SIZE: ISO A4		SCALE: xx:xx	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	Rev. n. xx/xx/xxxx	
± 0.12	± 0.15	± 0.3	± 0.5		

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

EC-HDMI282192111B