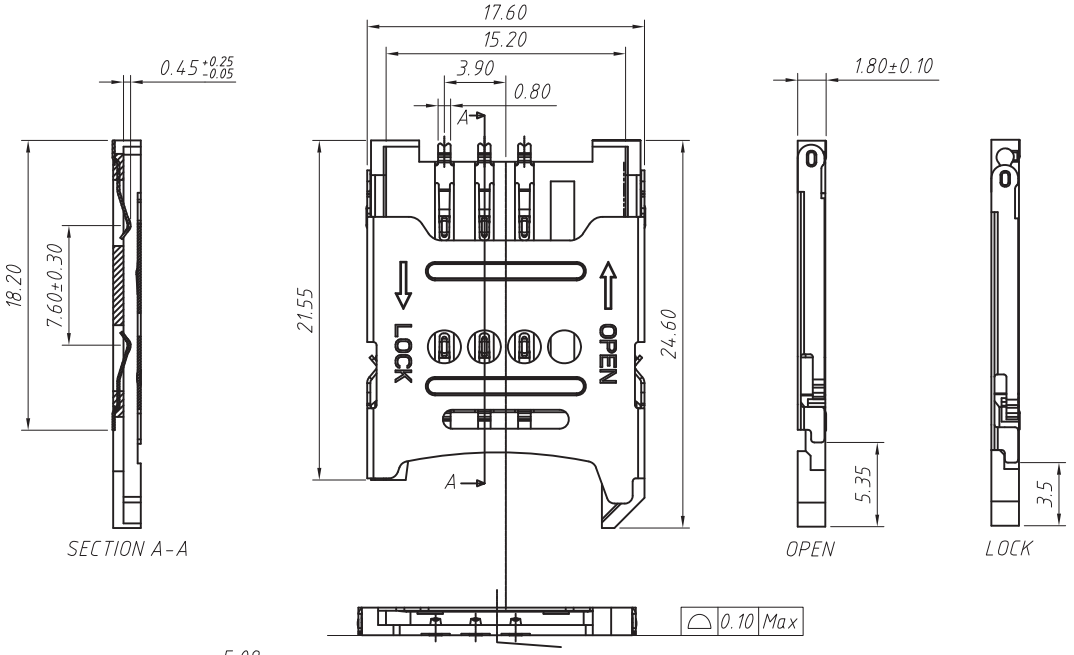

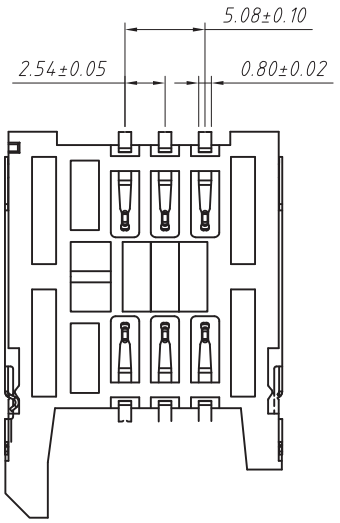

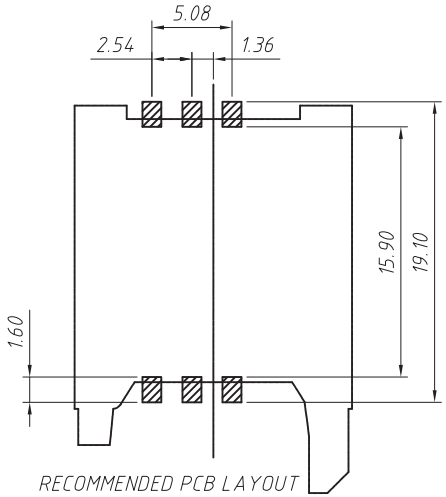



NOTES:

1.0 RATING.

1.1 VOLTAGE:12 VAC (rms)

1.2 CURRENT: 1 AMPERES MAX. PER CONTACT

1.3 OPERATION TEMPERATURE RANGE: -25°C ~ +70°C

2.0 ELECTRIC CHARACTERISTICS:

2.1 CONTACT RESISTANCE:60mΩ

2.2 INSULATION RESISTANCE: 1000MΩ

2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE

3.0 OPERATION LIFE: 5000 CYCLES

Pin No.	Pin Name
C1	Supply Voltage VCC
C2	Reset (RST)
C3	Clock (CLK)
C4	N/A
C5	Ground
C6	Programming Voltage VPP
C7	I / O
C8	N/A

General description of ordering code

FAMILY		N° PIN	TYPE
SCM12	-	06	K044A

euro-conn

RoHS Compliant Lead Free

UNITS: mm	SHEET SIZE: ISO A4	SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

SIM CARD PUSH PULL