Specifications

1、 Current rating: 3.0A AC,DC
2、 Voltage rating: 250V AC,DC
3、 Temperature range: -25℃ to +105℃
4、 Contact resistance: (Initial)≤10mΩ
(After environmental testing)≤20mΩ
5、 Insulation resistance: ≥1000MΩ
6、 Withstand voltage: 1000V AC/minute
7、 Applicable wire: AWG #30 to #22
8、 (Applicable PC board thickness):1.6mm
9, Wafer Brass Tin
10, Housing PA66(UL94V-0)

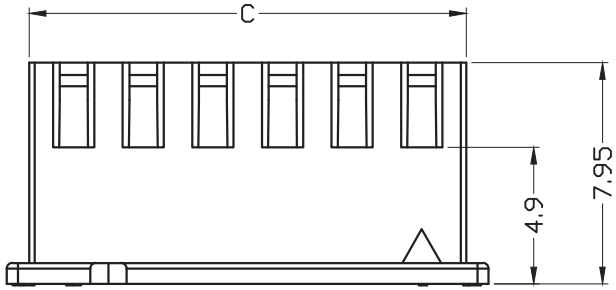



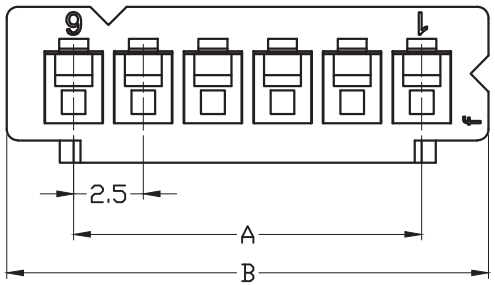



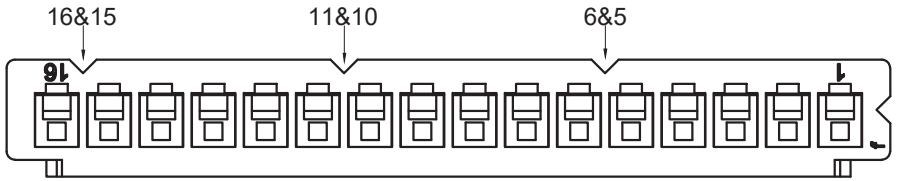

		Dimensions mm		
Poles	Part No.	A	B	C
2	WC250-02H	2.50	7.3	5.7
3	WC250-03H	5.00	9.8	8.2
4	WC250-04H	7.50	12.3	10.7
5	WC250-05H	10.00	14.8	13.2
6	WC250-06H	12.50	17.3	15.7
7	WC250-07H	15.00	19.8	18.2
8	WC250-08H	17.50	22.3	20.7
9	WC250-09H	20.00	24.8	23.2
10	WC250-10H	22.50	27.3	25.7
11	WC250-11H	25.00	29.8	28.2
12	WC250-12H	27.50	32.3	30.7
13	WC250-13H	30.00	34.8	33.2
14	WC250-14H	32.50	37.3	35.7
15	WC250-15H	35.00	39.8	38.2
16	WC250-16H	37.50	42.3	40.7
17	WC250-17H	40.00	44.8	43.2
18	WC250-18H	42.50	47.3	45.7
19	WC250-19H	45.00	49.8	48.2
20	WC250-20H	47.50	52.3	50.7

euro-conn

RoHS Compliant Lead Free

c UL us FILE N. E356435

UNITS: mm	SHEET SIZE: ISO A4	SCALE:	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
± 0.12	± 0.15	± 0.3	± 0.5

First angle projection

WC250-XXH