Specifications

1、 Current rating: 3.0A AC,DC
2、 Voltage rating: 250V AC,DC
3、 Temperature range: -25℃ to +105℃
4、 Contact resistance: (Initial)≤10mΩ
(After environmental testing)≤20mΩ
5、 Insulation resistance: ≥1000MΩ
6、 Withstand voltage: 1000V AC/minute
7、 Applicable wire: AWG #30 to #22
8、 (Applicable PC board thickness):1.6mm
9, Contact, Brass Tin
10, Housing, LCP (UL94V-0)
11, Solder Tab, Phos-Brass Tin

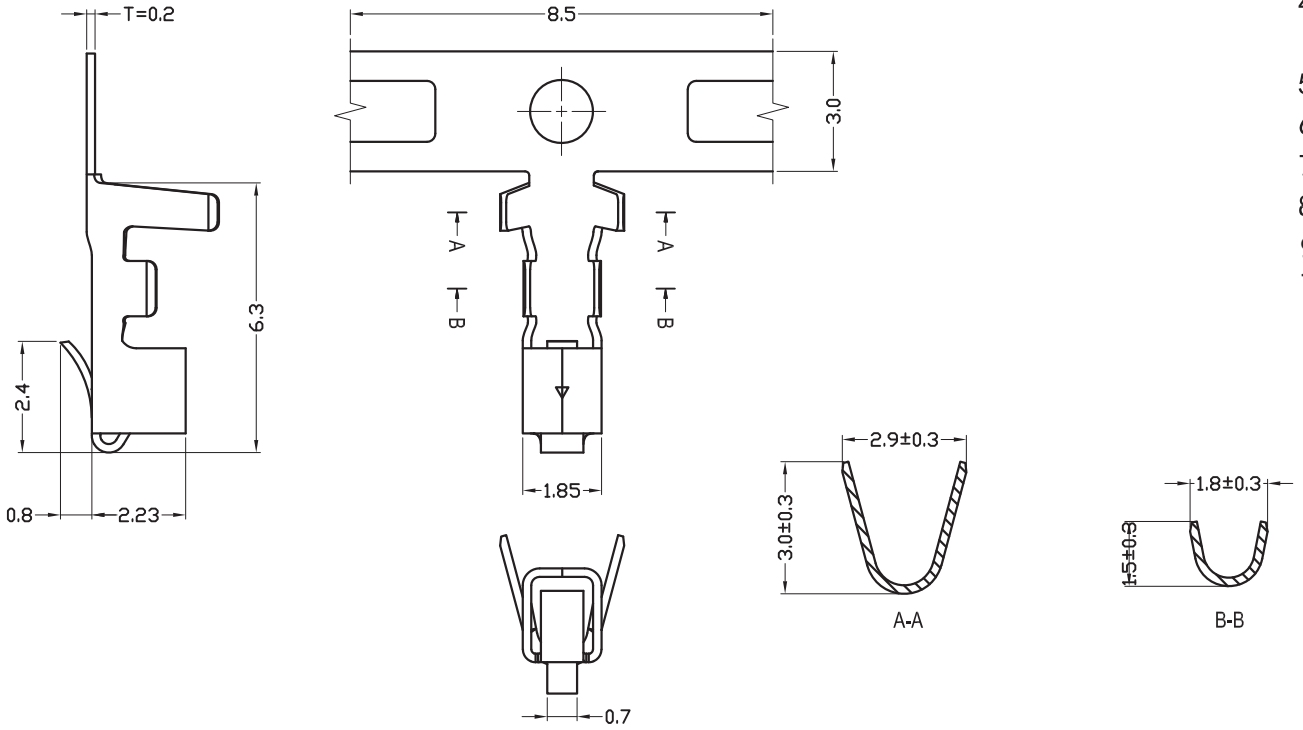

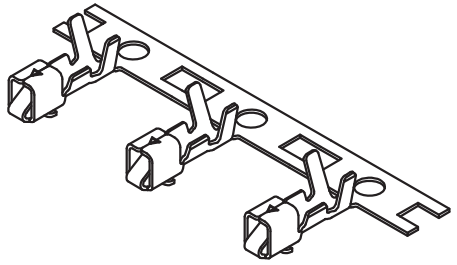

euro-conn	UNITS: mm	SHEET SIZE: ISO A4	SCALE:	First angle projection
	> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120
	± 0.12	± 0.15	± 0.3	± 0.5

WC250-T1